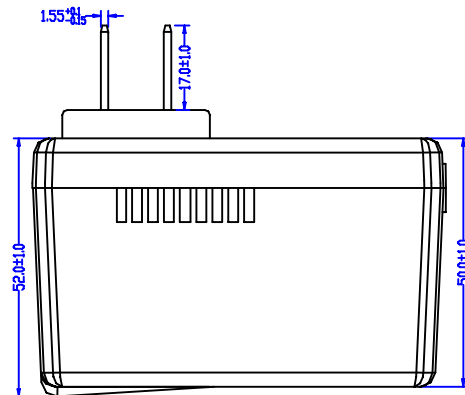
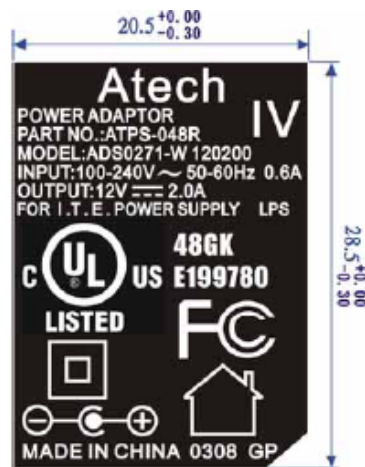
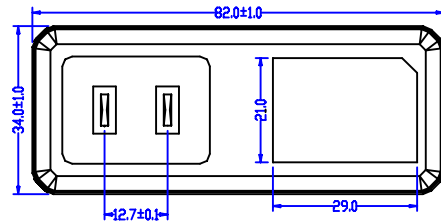


ELECTRICAL CHARACTERISTICS :

- 24WATTS SWITCHING MODE AC-DC ADAPTER
- INPUT REQUIREMENT:

Normal Voltages	Voltage Variation Range	Normal Frequency	Frequency Variation Range
100-240VAC	90-264VAC	50-60Hz	47Hz to 63Hz

INPUT <@100-240VAC W/H NO LOAD TO FULL LOAD> : 0.6A MAX.

- OUTPUT REQUIREMENT :

Input normal voltage	Output Nominal Voltage	Output Regulation	Minimum Load (A)	Maximum Load (A)	Ripple (mVp-p)	Output power(w)
100-240VAC	12VDC	±5%	0.0	2.0	120	24

- OPERATING TEMPERATURE & HUMIDITY RANGE:
0°C-40°C,20% TO 90% RELATIVE HUMIDITY.
STORAGE TEMPERATURE & HUMIDITY RANGE:
-20°C TO 70°C,20% TO 90% RELATIVE HUMIDITY.

						Atech® Atech Technology Co., Ltd. TEL:02)2794-6667 FAX:02)2794-8004		TITLE SWITCHING POWER SUPPLY
						DWG. NO. ATPS-048R		
RELEASE		01/22/2008	Pair	Willie	Eugene	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW Pair
REVISIONS						01/22/08		