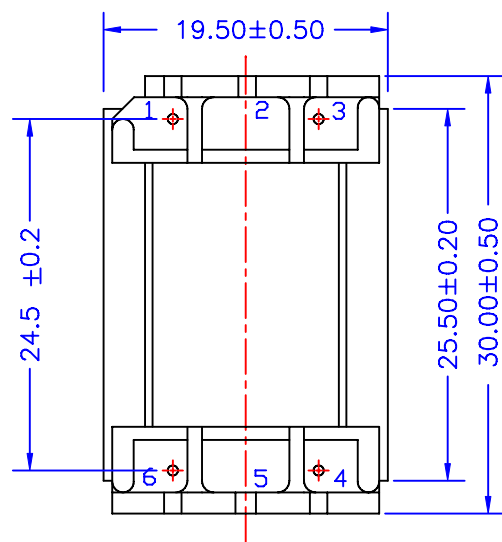
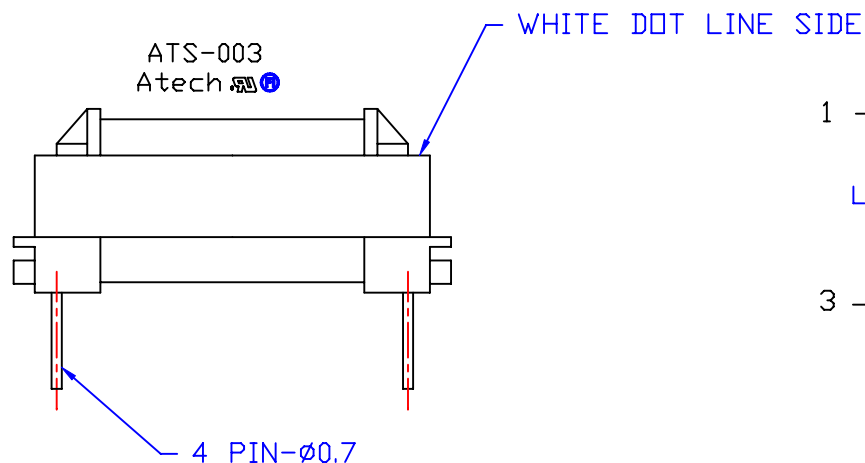
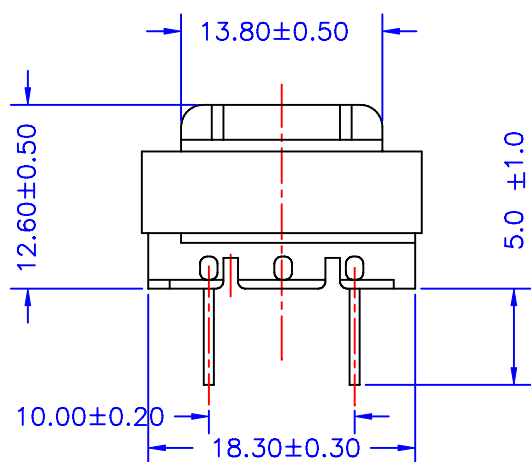


ELECTRICAL CHARACTERISTICS :

- 1 IMPEDANCE :
PIN 1-3 : 4-6 = 600 Ω $\pm$ 10% : 600 Ω (AT 1KHZ, W/H 80mADC)
- 2 D.C.R. : PIN 1-3 = 147 Ω $\pm$ 15%
PIN 4-6 = 104 Ω $\pm$ 15%
- 3 INSERTION LOSS (300HZ TO 3.5KHZ, W/H 80mADC)
AT 300HZ = 4.5 db MAX.
AT 1KHZ = 2.7 db MAX
AT 3.5KHZ = 2.7 db MAX.
- 4 RETURN LOSS (300HZ TO 3.5KHZ, W/H 80mADC)
AT 300HZ = 9.5 db MIN.
AT 1KHZ = 11 db MIN.
AT 3.5KHZ = 11 db MIN.
- 5 HI-POT = 3750VAC, 60HZ, 1mA, 1 MINUTE (LINE-DEVICE)
- 6 INSULATION RES. = 100 Ω MIN. AT 500 VDC (LINE - DEVICE)
- 7 POLARITY : (PIN 1 & PIN 6 INPHASE)
8. LEAD FREE.

						Atech® Atech Technology Co., Ltd. TEL:02)2794-6667 FAX:02)2794-8004	TITLE TRANSFORMER	
							DWG. NO. ATS-003N	
	RELEASE	04/29/2005	BART	MICHAEL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N: CTP219002A	DRAW <i>Pair</i>
REVISIONS						04/29/05		