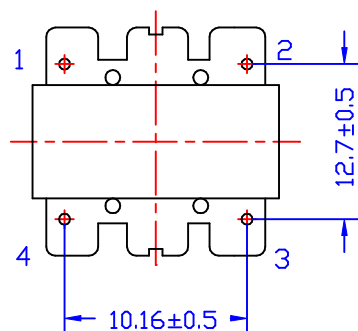
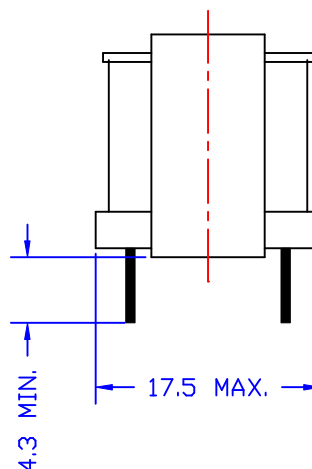
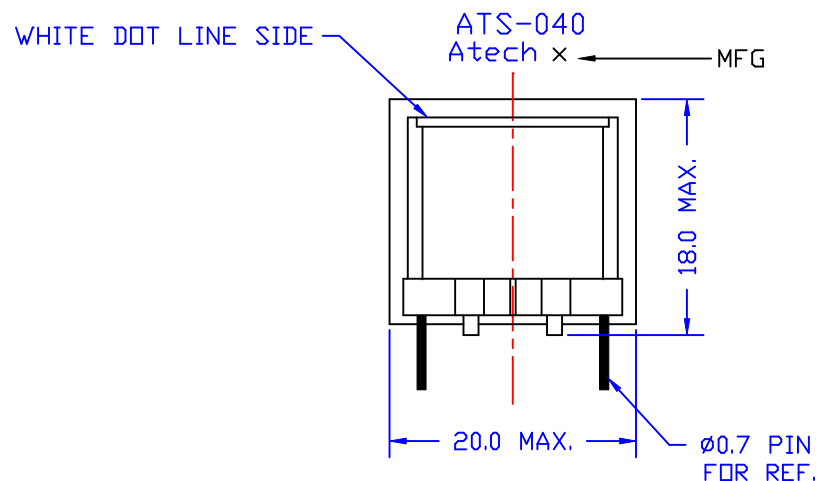


ELECTRICAL CHARACTERISTICS:

- 1 D.C.R. : PIN 1-2 = 40 Ω MAX. PIN 3-4 = 50 Ω MAX.
- 2 INDUCTANCE :(@1KHZ, 1Vrms) PIN 1-2 = 1.0H MIN.
- 3 IMPEDANCE :(@1KHZ,1Vrms, PIN 3-4 W/H 600 Ω) PIN 1-2 = 600 Ω +/-10%
- 4 INSERTION LOSS(@1KHZ,1Vrms, PIN 3-4 W/H 600 Ω)=0.8 db MAX.
- 5 FREQ. RESP.(REF.1KHZ):@300HZ = +/-0.2db
@4KHZ = +/- 0.2db
- 6 RETURN LOSS : (PIN 3-4 W/H 600 Ω M, REF. 600 Ω M)
@300HZ = 26 db MIN.
@1KHZ = 26 db MIN.
@3400HZ = 25 db MIN.
- 7 HI-POT(@1500VAC, 1mA, 1MINUTE): PRI-SEC-CORE
- 8 INSULATION RESISTANCE(@200 VDC) 1-3 = 100 M Ω MIN.
9. LEAD FREE

						Atech [®] Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE TRANSFORMER		
							DWG. NO. ATS-040N		
	RELEASE	05/18/2005	PAIR		SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW <i>Pair</i>
REVISIONS						05/18/05			