
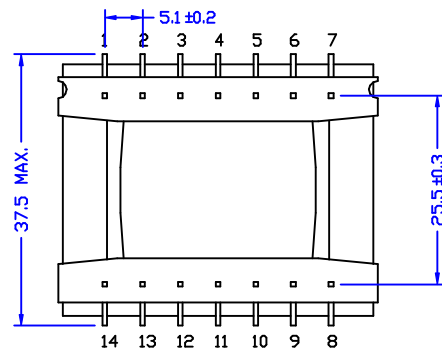
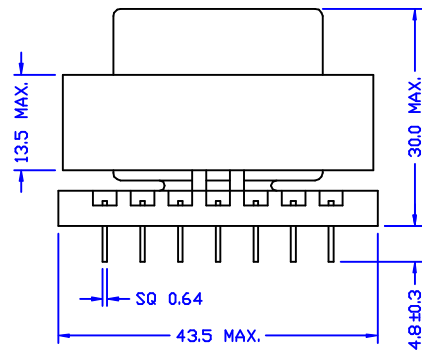



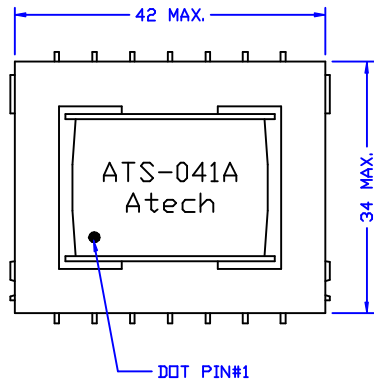

ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 3-6 = 98 OHM MAX.
2. INDUCTANCE (@1KHZ, 1Vrms) : PIN 3-6 = 2.4H MIN.
(@ W/H 100mA) : PIN 3-6 = 2H MIN.
3. HI-POT (@1500VAC, 1mA, 2SEC) : 3-CORE

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004		TITLE SLIC HOLDING COIL	
								DWG. NO. ATS-041A	
	RELEASE	12/29/2001	DOLLY	CPLIU	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS						12/29/01			