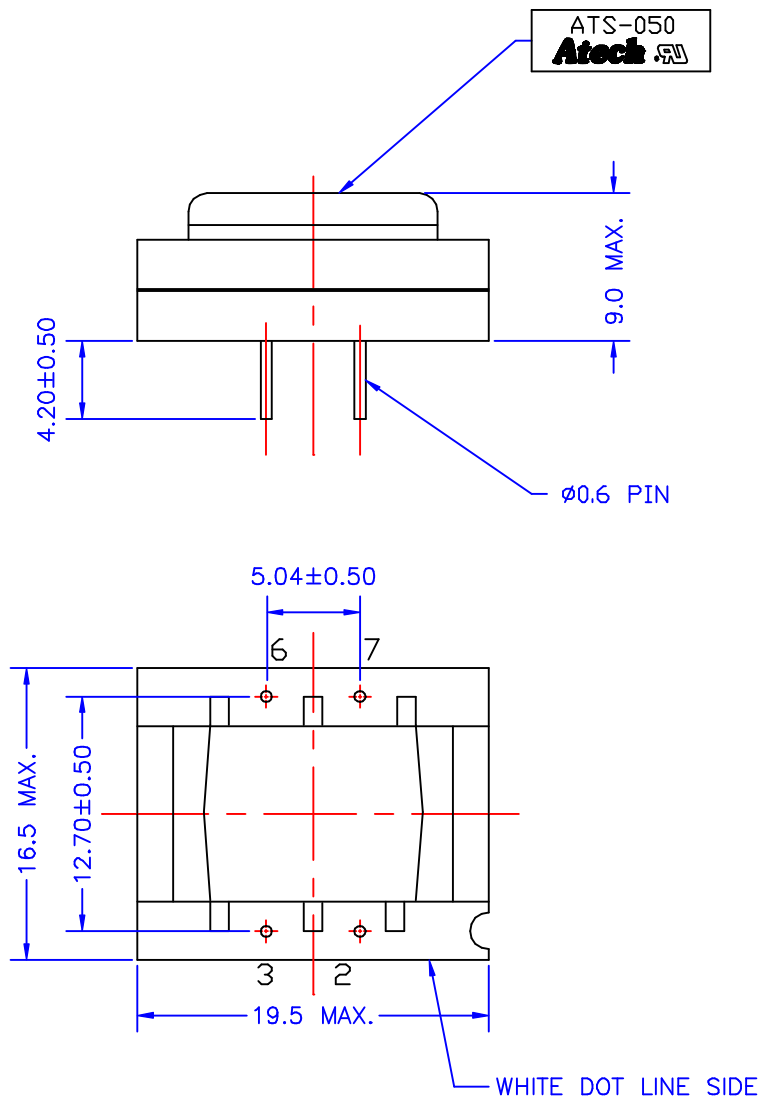


ELECTRICAL CHARACTERISTICS :

1. D.C.R. : PIN 2-3 = 120 OHM MAX.
PIN 6-7 = 170 OHM MAX.
2. INDUCTANCE : (<@1KHZ, 1Vrms, W/H 80mADC)
PIN 2-3 = 130mH MIN.
3. IMPEDANCE : (<@1KHZ, 1Vrms, W/H 80mADC)
PIN 6-7 W/H 600 OHM LOAD) PIN 2-3 = 600 OHM ± 10%
4. INSERTION LOSS : (<@1KHZ, 1Vrms, W/H 80mADC)
PIN 6-7 W/H 600 OHM LOAD)= 3.2 dB MAX.
5. FREQ. RESP = (<REF. 1KHZ) @300HZ = ± 3.5dB
@3.4KHZ = ± 1 dB
6. RETURN LOSS : @300HZ = 6dB MIN. (<W/H 80 mADC)
7. LOGITUDINAL BALANCE = 60dB MIN (<AT 1KHZ)
LOGITUDINAL BALANCE = 60dB MIN (<AT 3.4KHZ)
8. HI-POT (<@1500VAC, 1mA, 1MINUTE) : PRI-SEC

						Atech®		TITLE 600 : 600 WET TRANSFORMER	
						Atech Technology Co., Ltd.		DWG. NO.	
						TEL:022794-6667 FAX:022794-8004		ATS-050A	
RELEASE		09/26/2001	DOLLY	CPLIU	SUEDY	UNITS: M/M		SAFETY	
NO. DESCRIPTION		DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						09/26/01		E159603 Pair	