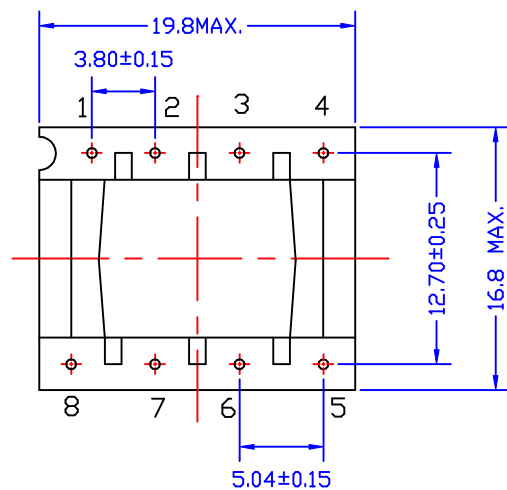
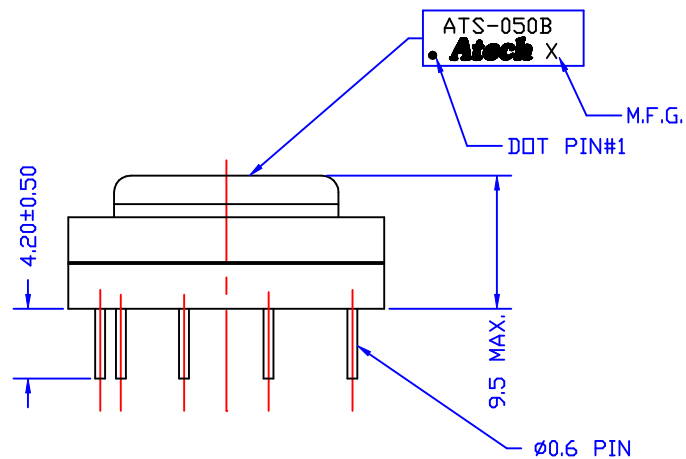


ELECTRICAL CHARACTERISTICS:

- DCR : PIN 2-3 = 127 OHM MAX.
PIN 6-7 = 254 OHM MAX.
- INDUCTANCE (@1KHZ, 1Vrms, W/H 80 mADC) :
PIN 2-3 = 130 mH MIN.
- IMPEDANCE (@650HZ, 1Vrms, W/H 80 mADC,
PIN 6-7 W/H 600 OHM LOAD) :
PIN 2-3 = 600 OHM $\pm 10\%$.
- INSERTION LOSS (@1KHZ, 1Vrms, W/H 80 mADC,
PIN 6-7 w/H 600 OHM LOAD) : 3.2 dB MAX.
- FREQUENCY RESPONSE (REF. 1KHZ) :
@300 HZ = ± 3.5 dB.
@3.4 KHZ = ± 1 dB.
- RETURN LOSS :
@300HZ = 5 dB MIN. W/H 80 mADC.
- LOGITUDINAL BALANCE :
@1KHZ = 60 dB MIN.
@3.4KHZ = 60 dB MIN.
- HI-PDT (@1500VAC, 1mA, 1MIN) : PRI-SCE.

					Atech®		TITLE 600 : 600 WET TRANSFORMER	
					Atech Technology Co., Ltd.		DWG. NO. ATS-050B	
					TEL: 02/2794-6667 FAX: 02/2794-8004			
RELEASE		10/15/2004	BART	MICHAEL	SUEDY	UNITS: M/M	SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		
REVISIONS						10/15/04	SHEET 1 OF 1	
							DRAW Pair	