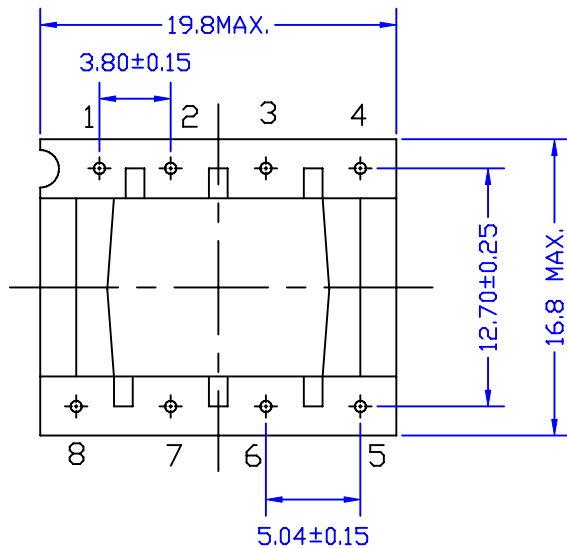
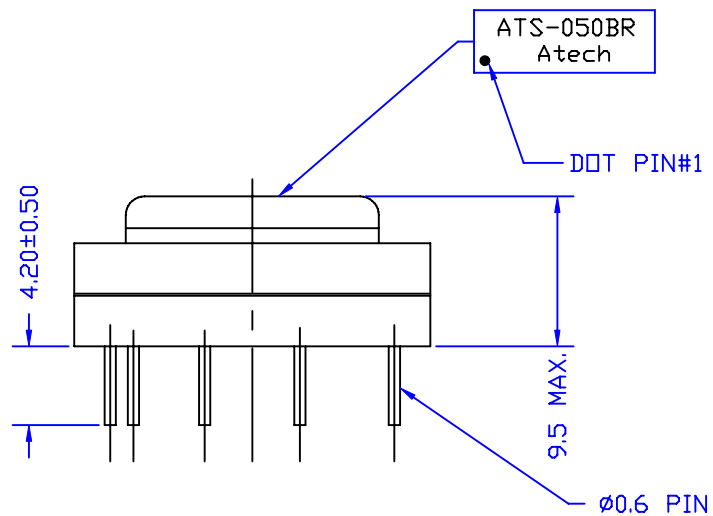


ELECTRICAL CHARACTERISTICS:

- DCR : PIN 2-3 = 127 OHM MAX.
PIN 6-7 = 254 OHM MAX.
- INDUCTANCE (@1KHZ, 1Vrms, W/H 80 mADC) :
PIN 2-3 = 130 mH MIN.
- IMPEDANCE (@650HZ, 1Vrms, W/H 80 mADC,
PIN 6-7 W/H 600 OHM LOAD) :
PIN 2-3 = 600 OHM %10%.
- INSERTION LOSS (@1KHZ, 1Vrms, W/H 80 mADC,
PIN 6-7 w/H 600 OHM LOAD) : 3.2 dB MAX.
- FREQUENCY RESPONSE (REF. 1KHZ) :
@300 HZ = ±3.5 dB.
@3.4 KHZ = ±1 dB.
- RETURN LOSS :
@300HZ = 5 dB MIN. W/H 80 mADC.
- LOGITUDINAL BALANCE :
@1KHZ = 60 dB MIN.
@3.4KHZ = 60 dB MIN.
- HI-POT (@1500VAC, 1mA, 1MIN) : PRI-SCE.
- RoHS Compliant

						Atech®		TITLE600 : 600 WET TRANSFORMER
						Atech Technology Co. Ltd.		DWG. NO.
						TEL:02794-6667 FAX:02794-8004		ATS-050BR
RELEASE		03/18/2005	BART	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N: CTP21900NA	DRAW Pair
REVISIONS						03/18/05		