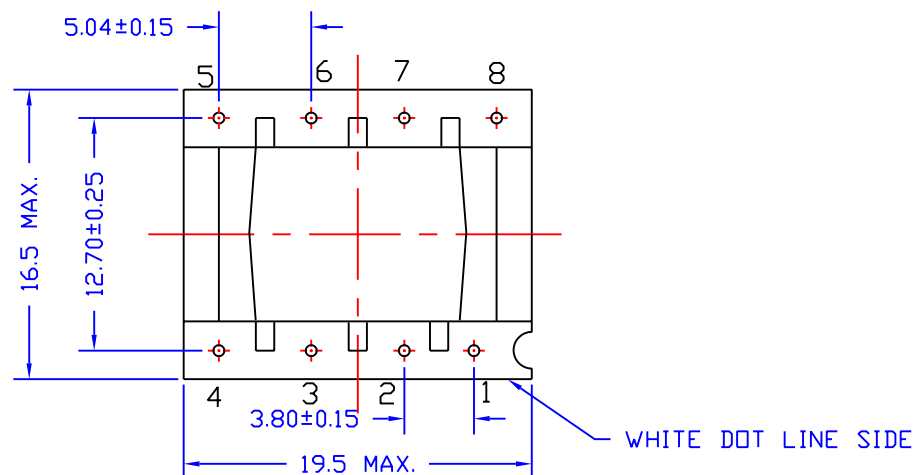
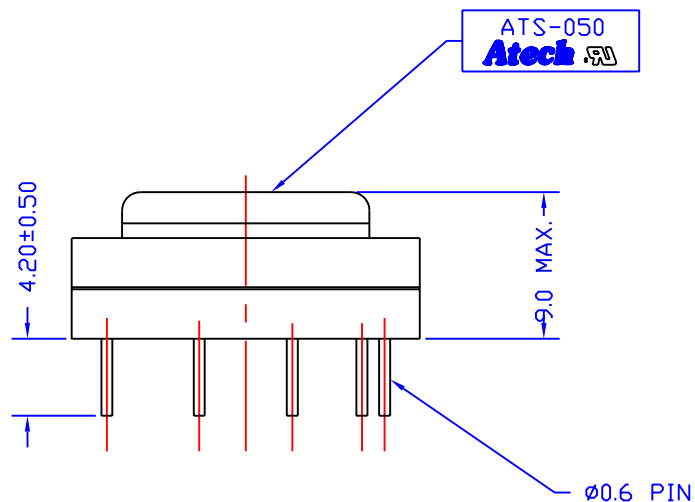


ELECTRICAL CHARACTERISTICS:

- 1 D.C.R. : PIN 2-3 = 120 Ω HM MAX.
PIN 6-7 = 170 Ω HM MAX.
- 2 INDUCTANCE (@1KHZ, 1Vrms, W/H 80mADC) : PIN 2-3 = 130mH MIN.
- 3 IMPEDANCE (@1KHZ, 1Vrms, W/H 80mADC, PIN 6-7 W/H 600 Ω HM LOAD) :
PIN 2-3 = 600 Ω HM $\pm 10\%$
= 3.2dB MAX.
- 4 INSERTION LOSS (@1KHZ, 1Vrms, W/H 80mADC PIN 6-7 W/H 600 Ω HM LOAD)
= 3.2dB MAX.
- 5 FREQ. RESP (@REF. 1KHZ) : @300HZ = ± 3.5 dB
@3.4KHZ = ± 1 dB
- 6 RETURN LOSS : @300HZ = 6dB MIN. (W/H 80 mADC)
- 7 LOGITUDINAL BALANCE = 60dB MIN (AT 1KHZ)
LOGITUDINAL BALANCE = 60dB MIN (AT 3.4KHZ)
- 8 HI-POT (@1500VAC, 1mA 1MINUTE) : PRI.- SEC.
9. LEAD FREE.

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004		TITLE: 600 WET TRANSFORMER	
								DWG. NO. ATS-050N	
	RELEASE	03/16/2005	BART	AL	SUEDY	UNITS: M/M	SAFETY E159603 	SHEET 1 OF 1	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS						03/16/05			