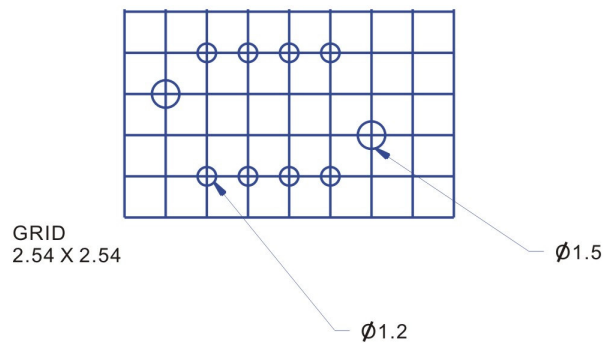
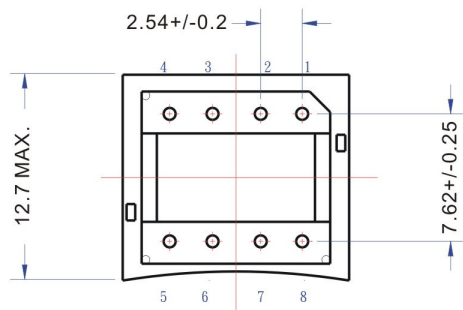
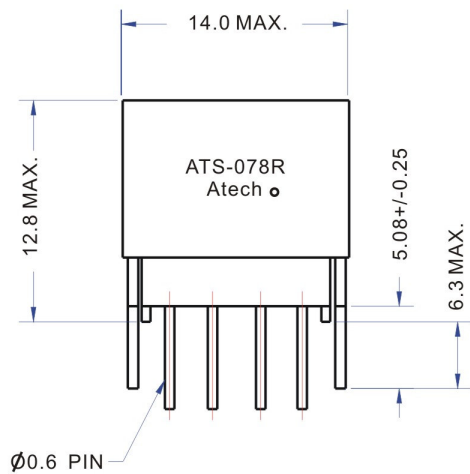


ELECTRICAL CHARACTERISTICS:

(FOR SIEMENS PEB2080, 2081, 2085, 2086, 2186, NS TP3420, MITEL Mt8930)

1. D.C.R. : PIN 1-3 = 0.6 OHM +/- 15% PIN 2-4 = 0.6 OHM +/- 15%

PIN 5-8 = 3.1 OHM +/- 15%

2. INDUCTANCE : (@10KHZ , 0.1Vrms) PIN 1-4 = 23mH MIN. (PIN 2-3 SHORT)

3. INTERWINDING CAPACITANCE : (@10KHZ , 0.1Vrms) PIN 1-8 = 40pF MAX.
(PIN 2-3 SHORT)

4. LEAKAGE : (@100KHZ , 0.1Vrms , W / H 2-3 , 5-8 SHORT) PIN 1-4 = 25uH MAX.

5. TURN RATIO : PIN 8-5 : 1-3 : 2-4 = 4 : 1 : 1

6. HI-POT : (1500 VAC , 1mA , 2SEC) LINE-DEVICE

						Atech[®] Atech Technology Co., Ltd. TEL: (02)2794-6667 FAX: (02)2794-8004	TITLE ISDN S TRANSFORMER		
							DWG NO. ATS-078R		
	RELEASE	08/20 /2008	Isaac	Vincent	Eugene		UNITS M/M	SAFETY	SHEET 1 / 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD		DATE 20080820		DRAW Isaac
REVISIONS									