

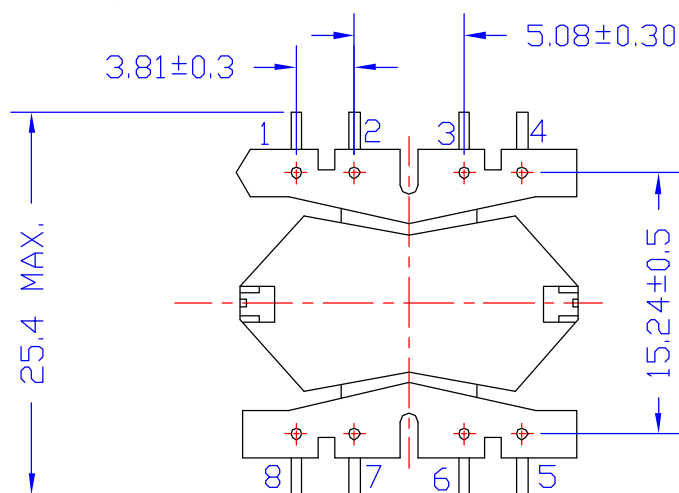
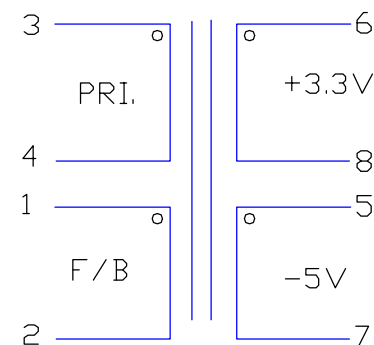


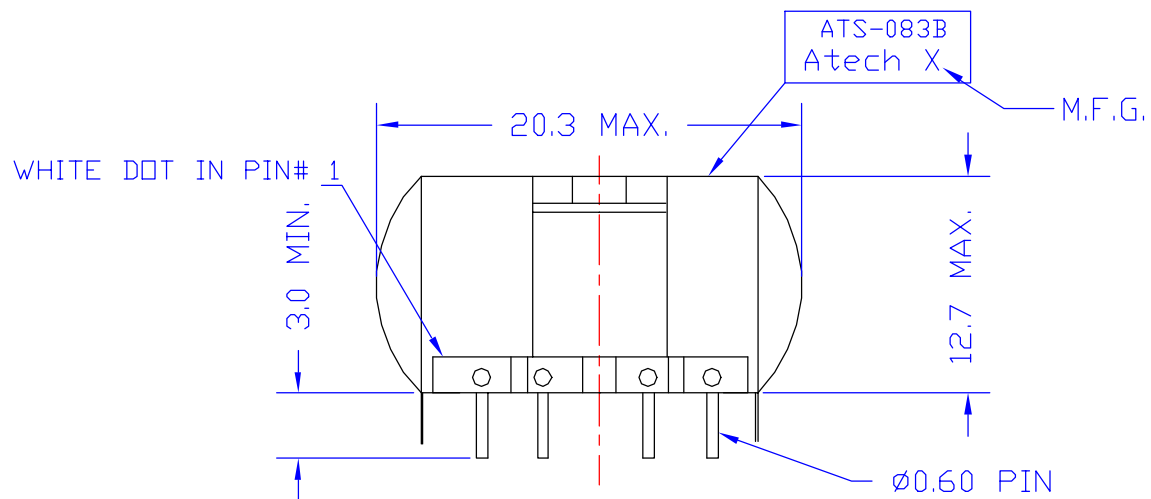

ELECTRICAL CHARACTERISTICS: (FOR SI 9105 ISDN DC/DC EMERGENCY)

1. D.C.R. : PIN 1-2 = 3 Ω HM MAX. PIN 3-4 = 5 Ω HM MAX.
PIN 5-7 = 0.18 Ω HM MAX. PIN 6-8 = 0.10 Ω HM MAX.
2. INDUCTANCE(@10KHZ, 0.5Vrms) : PIN 3-4 = 3.75mH $\pm$ 5%
3. LEAKAGE INDUCTANCE(@100KHZ, 0.5Vrms, W/H PIN 1-2 SHORT):
PIN 3-4 = 80 μ H MAX.
4. TURN RATIO(@100KHZ, 0.5Vrms)
PIN 3-4 : 1-2 = 2.2 $\pm$ 1%
PIN 3-4 : 5-7 = 4.29 $\pm$ 1%
PIN 3-4 : 6-8 = 5.93 $\pm$ 1%
5. HI-POT(@1500Vrms, 1mA, 2SEC) : PIN 1-5, 1-6, 1-CORE
PIN 3-5, 3-6, 3-CORE

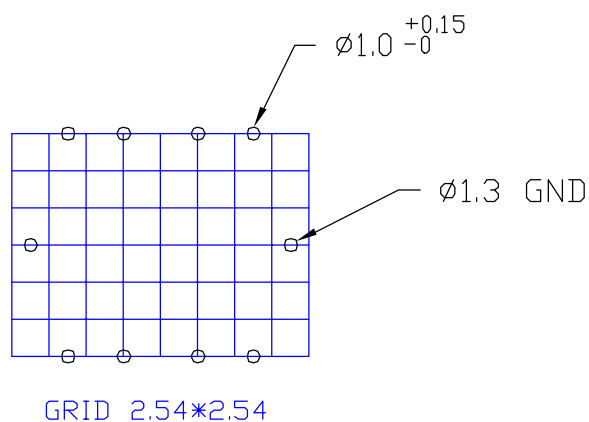

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE DC/DC TRANSFORMER			
							DWG. NO. ATS-083B			
	RELEASE	07/26/2005	BART	VINCENT	SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW <i>Pair</i>	
REVISIONS						07/26/05				