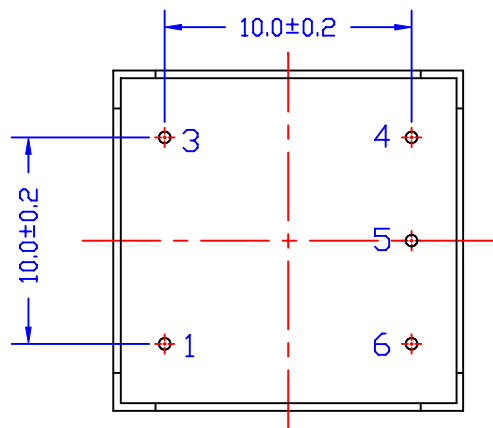
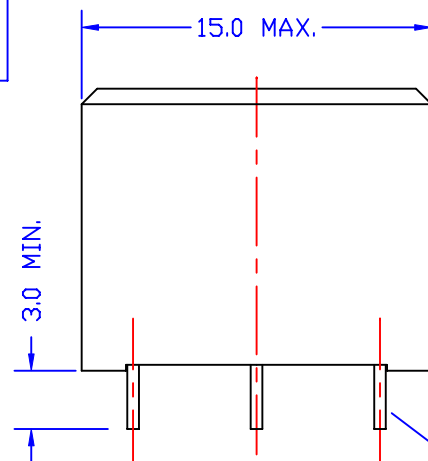
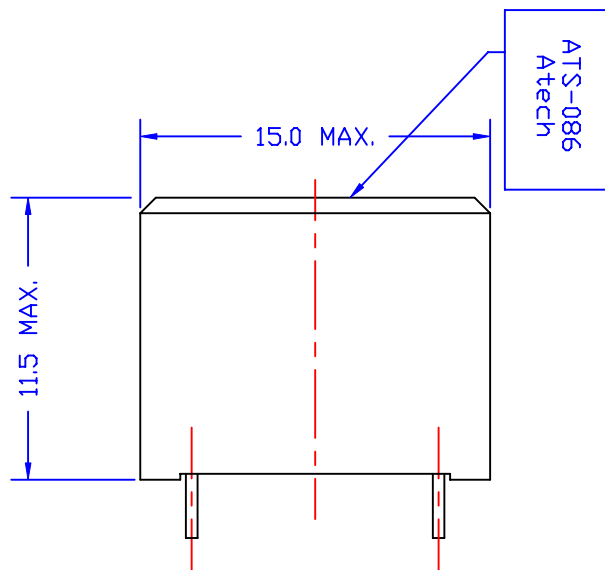


OPTIMUM CLASS (B) 600 OHM MATCH

ELECTRICAL CHARACTERISTICS : (COMPATIBLE WITH P1165)

- DCR : PIN 1-3 = 60 OHM $\pm$ 9%
PIN 6-4 = 60 OHM $\pm$ 9%
- INDUCTANCE (@200HZ, 1Vrms, PARALLEL) : PIN 1-3 = 2.5H MIN.
- RETURN LOSS (REF. 600 OHM) : @200HZ-4KHZ = 28dB MIN.
- INSERTION LOSS : (@1KHZ, 0dBm) = 1.0 $\pm$ 0.2dB
- FREQ. RESPONSE (REF. 1KHZ) : @200HZ = $\pm$ 0.2dB
@4KHZ = $\pm$ 0.5dB
- LONGITUDINAL BALANCE : 200HZ-4KHZ = 80dB MIN.
- TURN RATIO (4KHZ, 1Vrms) : PIN 1-3 : 6-4 = 1 $\pm$ 1%
- DISTORTION (600HZ, -10dBm) : -75dB MAX.
- HI-POT : (3750VAC, 1mA, 2SEC) PRI-SEC
- RoHS COMPLIANCE.

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE 600 : 499 TRANSFORMER	
							DWG. NO. ATS-086R	
A	DELETE BAPT NO	09/14 /2006	PAIR	SEN	EUGENE	UNITS: M/M	SAFETY	SHEET1 OF 1
	RELEASE	10/03 /2005	BART	LYS	SUEDY			
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						10/03/05		