
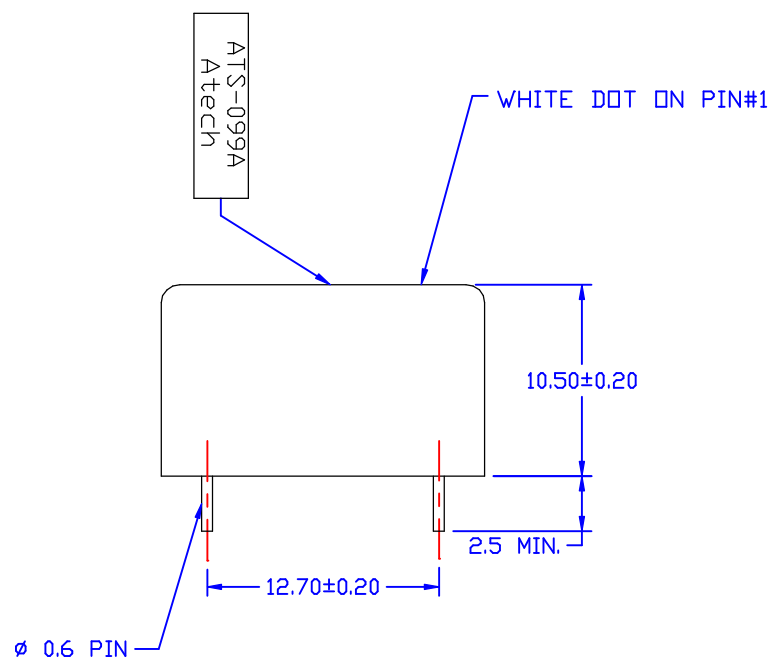
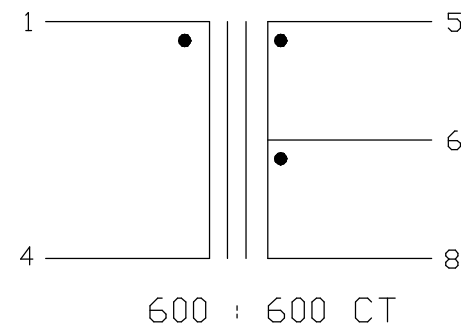


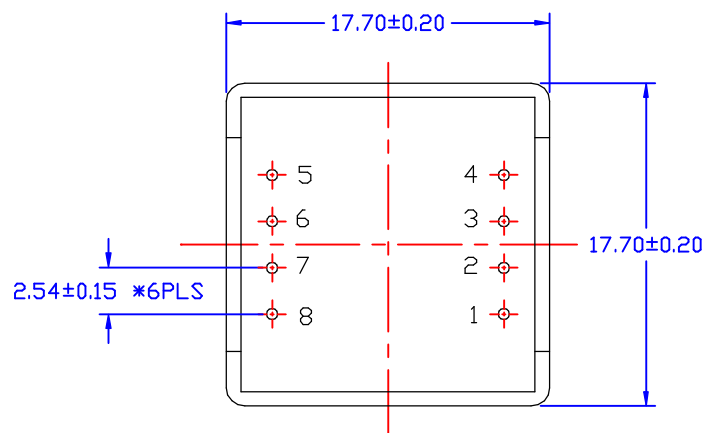

ELECTRICAL CHARACTERISTICS: (COMPATIBLE W/H LM-NP-1002)

1. D.C.R. : 1-4 = $66 \Omega \pm 10\%$ 5-8 = $66 \Omega \pm 10\%$
2. PARALLEL INDUCTANCE : (@ 200HZ, 1Vrms) 1-4 = 5-8 = 2.8H MIN.
3. IMPEDANCE : (@ 1KHZ, 1Vrms, W/H 600 Ω HM LOAD) = $600 \Omega \pm 20\%$
4. INSERTION LOSS : (@ 2KHZ, 1Vrms, W/H 600 Ω HM LOAD) = 1.5 dB MAX.
5. FREQ. RESP. : (REF. 1KHZ) @ 200HZ = -0.3 dB MAX.
@ 4KHZ = -0.3 dB MAX.
@ 10KHZ = -2.0 dB MAX.
6. RETURN LOSS : (REF. 600 Ω HM) @ 200HZ = 18 dB MIN.
@ 1KHZ = 18 dB MIN.
@ 4KHZ = 12 dB MIN.
7. TURN RATIO : (@10KHZ, 1Vrms) 1-4 : 5-8 = $1 \pm 1\%$
8. LONGITUDINAL BALANCE : @ 300HZ - 4KHZ = 80 dB MIN.
9. T.H.D. : (@ 1.KHZ, 0dBm) = 0.1% MAX.
10. HI-POT : (@ 4KVAC, 1mA, 1MINUTE) PRI-SEC.

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE 600 : 600 C TRANSFORMER	
							DWG. NO. ATS-099A	
	RELEASE	06/07/2001	DOLLY		SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 06/07/01		DRAW <i>Pair</i>
REVISIONS								