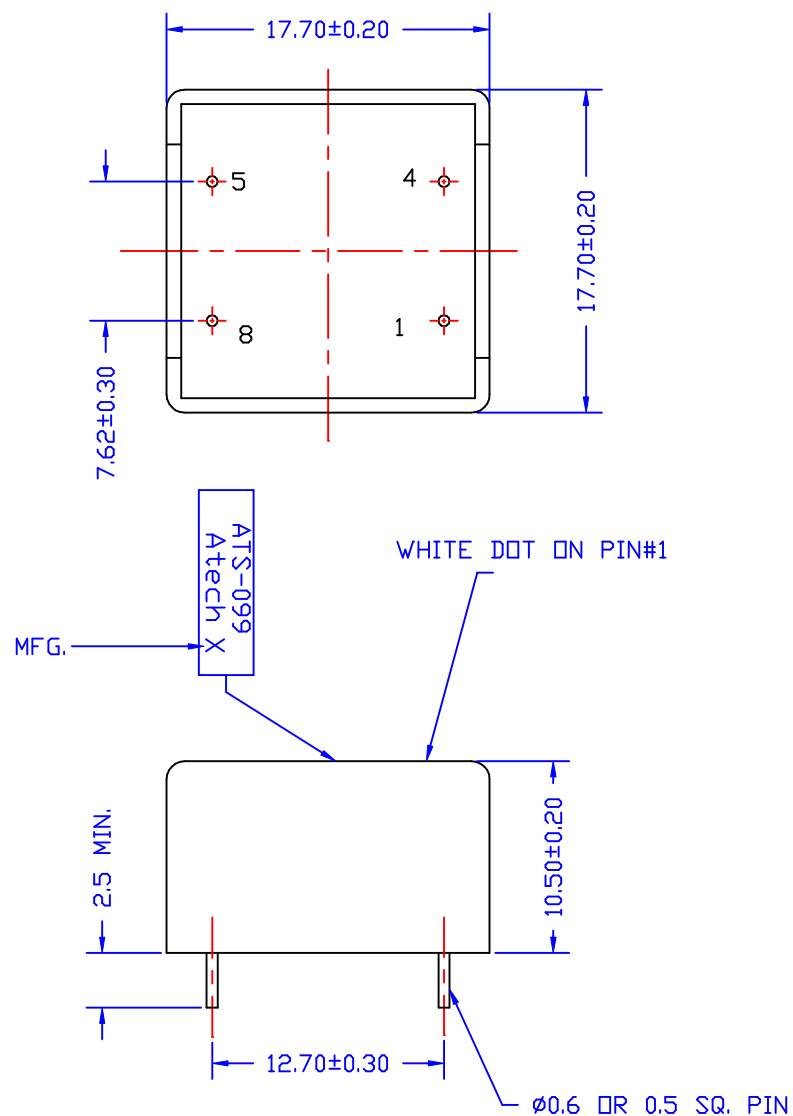


ELECTRICAL CHARACTERISTICS: (COMPATIBLE W/H LM-NP-1001)

1. D.C.R. : 1-4 = 66 Ω M $\pm$ 10% 5-8 = 66 Ω M $\pm$ 10%
2. PARALLEL INDUCTANCE : (<@ 200HZ, 1Vrms>) 1-4 = 5-8 = 2.8H MIN.
3. IMPEDANCE : (<@ 1KHZ, 1Vrms, W/H 600 Ω M LOAD>) = 600 Ω M $\pm$ 20%
4. INSERTION LOSS : (<@ 2KHZ, 1Vrms, W/H 600 Ω M LOAD>) = 1.5 dB MAX.
5. FREQ. RESP. : (REF. 1KHZ)
 - @ 200HZ = -0.3 dB MAX.
 - @ 4KHZ = -0.3 dB MAX.
 - @ 10KHZ = -2.0 dB MAX.
6. RETURN LOSS : (REF. 600 Ω M)
 - @ 200HZ = 18 dB MIN.
 - @ 1KHZ = 18 dB MIN.
 - @ 4KHZ = 12 dB MIN.
7. TURN RATIO : (<@10KHZ, 1Vrms>) 1-4 : 5-8 = 1 $\pm$ 1%
8. LONGITUDINAL BALANCE : @ 300HZ - 4KHZ = 80 dB MIN.
9. T.H.D. : (<@ 1.KHZ, 0dBm>) = 0.1% MAX.
10. HI-POT : (<@ 4KVAC, 1mA, 1MINUTE>) PRI-SEC.
11. LEAD-FREE

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE TRANSFORMER		
							DWG. NO. ATS-099N		
	RELEASE	11/19/2004	PAIR	AL	SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 11/19/04			DRAW <i>Pair</i>
REVISIONS									