
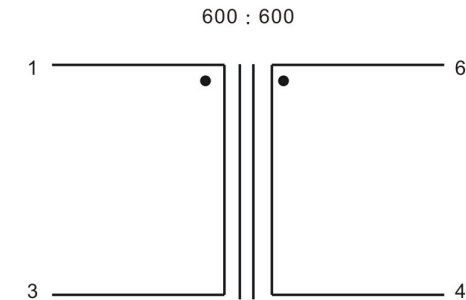
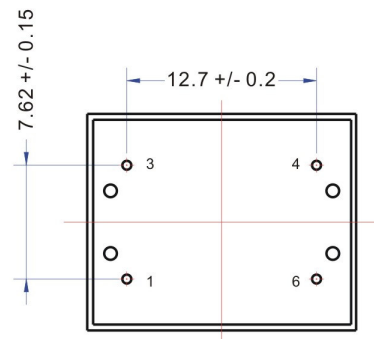
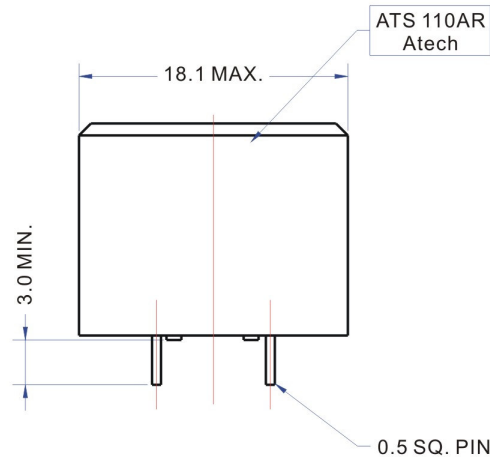


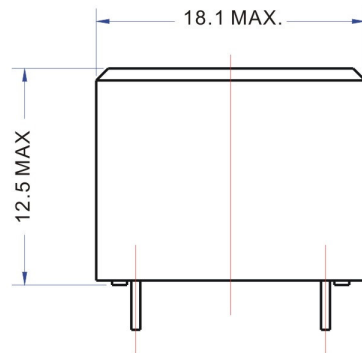

ELECTRICAL CHARACTERISTICS : (FOR V3.2bis)

- 1.D.C.R. : PIN 1-3 = 14 OHM MAX.
PIN 4-6 = 14 OHM MAX.
- 2.INDUCTANCE (@1KHZ , 1Vrms) : PIN 1-3 =650 mH MIN.
- 3.IMPEDANCE(@1KHZ , 1Vrms , PIN 4-6 W/H 600 OHM) :
PIN 1-3 =600 OHM +/-5%.
- 4.INSERTION LOSS(@1KHZ , 1Vrms , PIN4-6 W/H 600 OHM) :
PIN 1-3 = 0.5 dB MAX.
- 5.RETURN LOSS(REF. 600OHM , PIN 4-6 W/H 600 OHM) :
@300 HZ = 23 dB MIN.
@1 KHZ = 25 dB MIN.
@4 KHZ = 20 dB MIN.
- 6.FREQ. RESP(REF. 1KHZ):
@300 HZ = +/- 0.2 dB.
@4K HZ = +/- 0.2 dB.
- 7.T.H.D. (@600 HZ , -10 dB) = -80 dB MAX.
- 8.HI-POT(@3750V , 1mA , 1 MINUTE) : PIN 1-4
- 9.RoHS COMPLIANT.

						Atech[®] Atech Technology Co., Ltd. TEL: (02)2794-6667 FAX: (02)2794-8004	TITLE 600:600 TRANSFORMER	
							DWG NO. ATS-110AR	
	RELEASE	08/27 /2008	Isaac	Willie	Eugene	UNITS M/M	SAFETY E159603	SHEET 1 / 1
NO.	DESCRIPTION	DATE	BY	CHK	APP	DATE 20080827	P/N	DRAW Isaac
REVISIONS								