
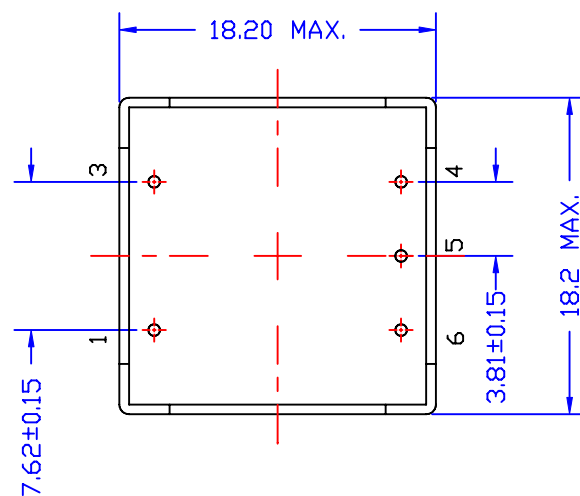
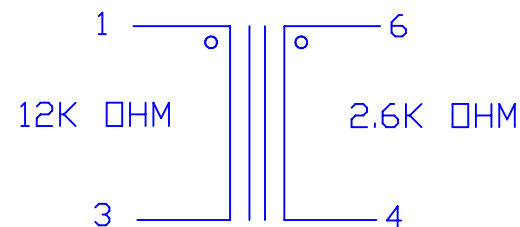


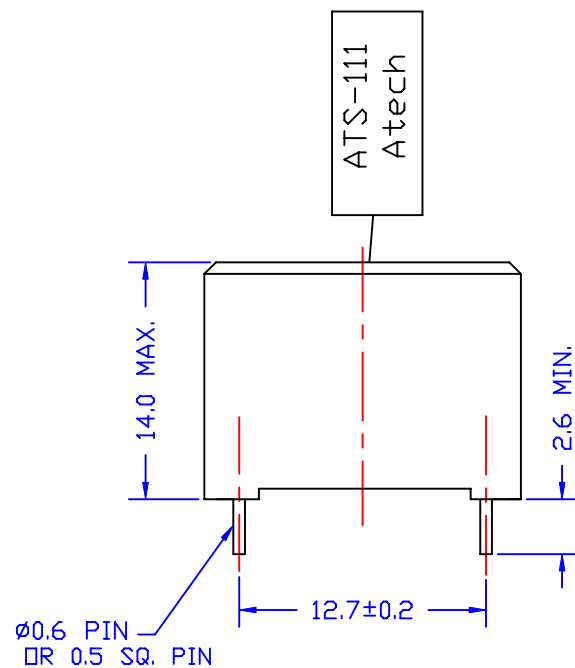

ELECTRICAL CHARACTERISTICS: (COMPATIBLE W/H P1727)

1. D.C.R. : PIN 1-3 = 450 ΩHM MAX. PIN 4-6 = 135 ΩHM MAX.
2. INDUCTANCE (@1KHZ, 1Vrms): PIN 1-3 = 8.5 Hy MIN.
3. IMPEDANCE (@1KHZ, 1Vrms, PIN 4-6 W/H 2.6K ΩHM LOAD)
PIN 1-3 = 12 KΩHM +/-3%
4. INSERTION LOSS (@1KHZ, 1Vrms, W/H 2.6K ΩHM) = 1dB MAX.
5. TURNS RATIO (@5KHZ, 1Vrms) PIN 1-3 : 6-4 = 2.16 +/-1%
6. HI-POT (@3750VAC, 1mA, 1 MINUTE) PIN 1-4
7. RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE		TRANSFORMER	
								DWG. NO.		ATS-111R	
	RELEASE	03/22/2007	PAIR		SUEDY	UNITS: M/M		SAFETY			SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		E159603			DRAW
REVISIONS						03/22/07					Pair