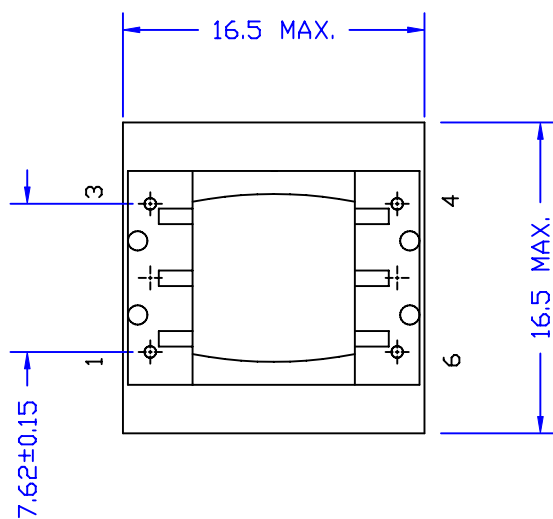
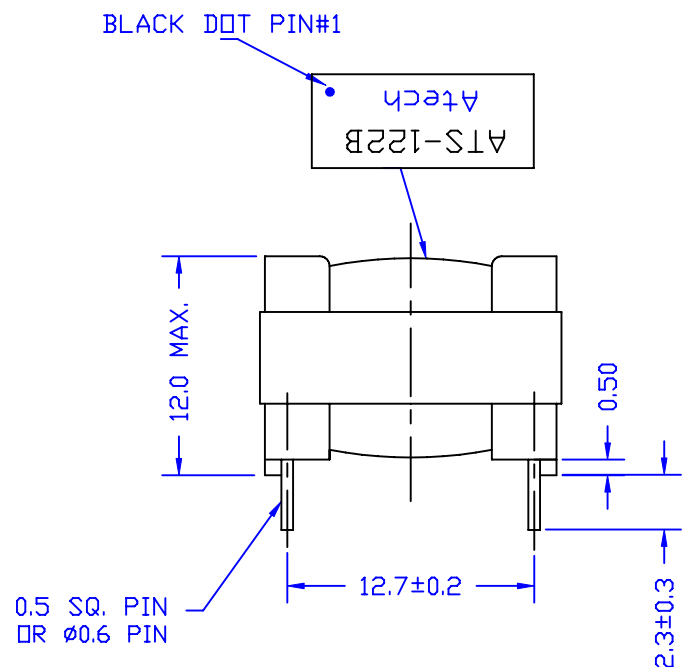


OPTIMUM CLASS (B) 600 OHM MATCH

ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-3 = 80 OHM+/-10% PIN 6-4 = 106 OHM+/-10%
2. INDUCTANCE(@1KHZ,0.1Vrms) PIN 1-3 = 3.5H MIN.
3. LEAKAGE INDUCTANCE(@1KHZ,0.1Vrms) : PIN 1-3 = 10mH MAX.
4. RETURN LOSS : (REF. 600 OHM) 200 TO 4KHZ = 32dB MIN.
@ 1KHZ = 40dB TYP.
5. INSERTION LOSS : (@1KHZ,1Vrms) 1.55dB MAX.
6. FREQ. RESPONSE: (REF. 1KHZ) 200 TO 4KHZ = +/-0.1dB
7. LONGITUDINAL BALANCE : 200HZ-4KHZ 70dB MIN.
8. TURN RATIO : (@6KHZ, 0.1Vrms) PIN 1-3 : 4-6 = 1+/-1%
9. DISTORTION : 300HZ, -10dBm : -82dB MAX.
10. HI-POT : (3750 VAC, 1mA, 1MIN.) PIN 1-6

E	Ø0.6 PIN	03/27/98	PAIR		SUEDY	Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004	TITLE	600 : 432 TRANSFORMER
D	MATCH CKT						DWG. NO.	ATS-122B
C	R/L 1KHZ							
	RELEASE		PAIR		SUEDY	UNITS:	SAFETY	
						M/M		
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	SHEET 1 OF 1
REVISIONS							CTP016007A	DRAW <i>Pair</i>