
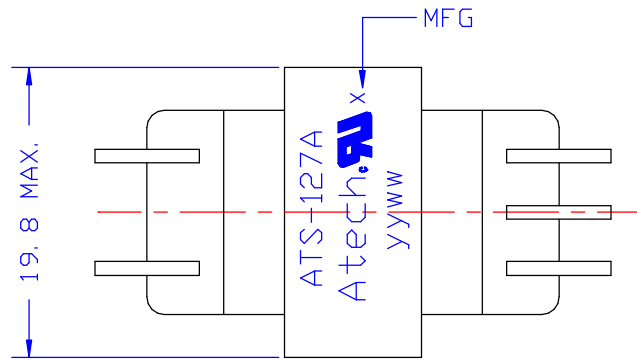
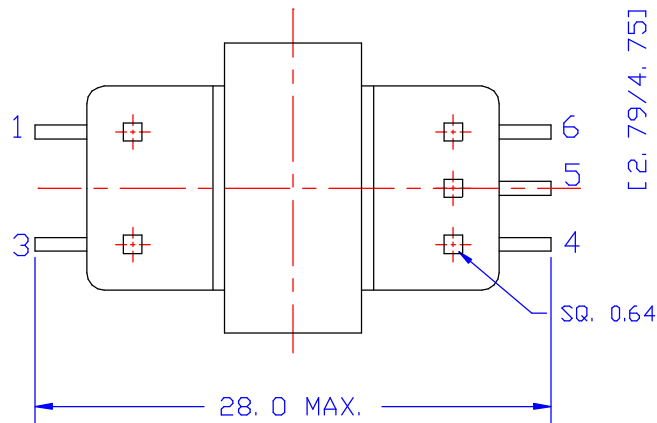
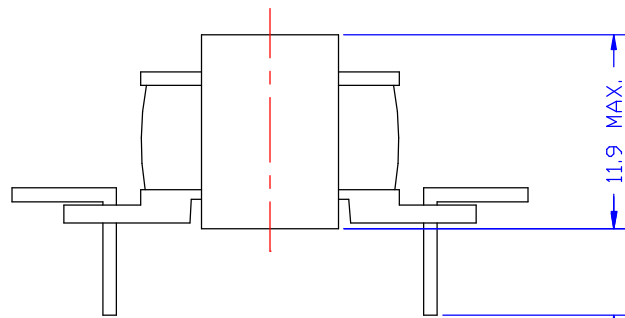


TRUE POSITION GRID
2.54(0.1") GRID

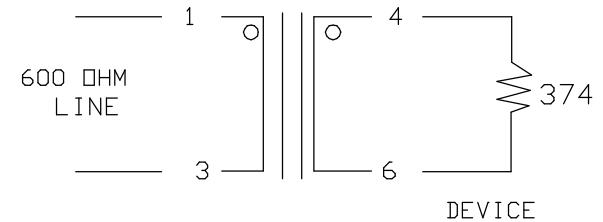

ELECTRICAL CHARACTERISTICS: (COMPATIBLE WITH 671-8262)

1. D. C. R. : PIN 1-3 = 108 OHM $\pm$ 10%
PIN 6-4 = 120 OHM $\pm$ 10%
2. INDUCTANCE : (<@200HZ, 1Vrms) PIN 3-1 = 16H MIN. (PARALLEL)
3. LEAKAGE INDUCTANCE : (<@1KHZ, 1Vrms W/H PIN 6-4 SHORT)
PIN 3-1 = 12mH MAX.
4. IMPEDANCE : (<@1KHZ, 1Vrms) PIN 1-3 = 600 OHM $\pm$ 5%
5. RETURN LOSS : (REF. 600 OHM) 300HZ-3.5KHZ = 15 dB MIN.
6. INSERTION LOSS : (<@1KHZ, 1Vrms) 2.25dB MAX.
7. FREQ. RESPONSE : (REF. 1KHZ) @200HZ = $\pm$ 0.2dB
@4KHZ = $\pm$ 0.2dB
8. LONGITUDINAL BALANCE : 200HZ-4KHZ 60dB MIN.
9. TURN RATIO : (<@3KHZ, 1Vrms) PIN 1-3 : 4-6 = 1 $\pm$ 1%
10. DISTORTION : 300HZ -10dBm : -83dB MAX.
150HZ, -3dBm : -75dB MAX.
11. HI-POT : (1250 VAC, 1mA, 2SEC.) PIN 1-4
12. LEAD-FREE

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE 600 : 374 TRANSFORMER	
A	LABEL	06/08 /2004	BART	AL	SUEDY			DWG. NO. ATS-127AN	
	RELEASE	05/06 /2004	PAIR	SUEDY	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS									