

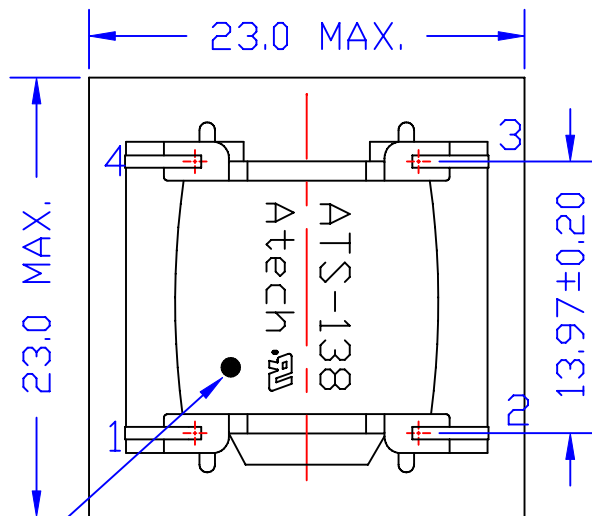
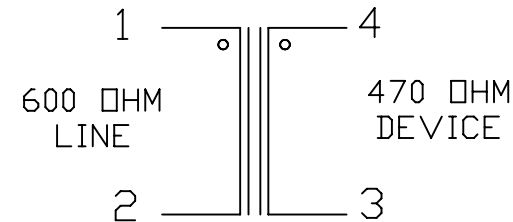


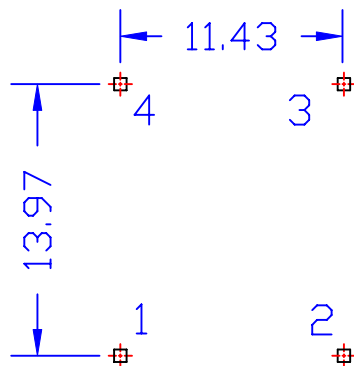

BLACK DOT PIN#1

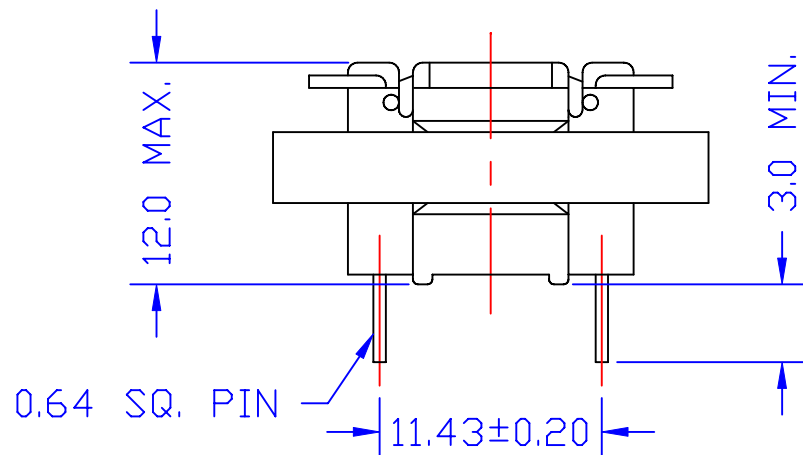

ELECTRICAL CHARACTERISTICS: (FOR 9624, 671-8005, 671-8015 COMPATIBLE)

1. D.C.R. : PIN 1-2 = 108 OHM $\pm$ 10% PIN 3-4 = 128 OHM $\pm$ 10%
2. INDUCTANCE (@300HZ, 1Vrms, W/H 80mADC) : PIN 1-2 = 300mH MIN.
3. RETURN LOSS : (REF. 600 OHM) @ 300HZ = 7.5dB MIN.
@ 1KHZ = 12dB MIN.
@ 4KHZ = 12dB MIN.
4. INSERTION LOSS : (@1KHZ, 0dBm, W/H 80mADC) 2.0 $\pm$ 0.5dB
5. FREQ. RESPONSE : (REF. 1KHZ) @ 300HZ = $\pm$ 2.0dB
@ 4KHZ = $\pm$ 0.5dB
6. LONGITUDINAL BALANCE : 200HZ-4KHZ 65dB MIN.
7. TURN RATIO : (15KHZ, 0.1Vrms) PIN 1-2 : 4-3 = 1 $\pm$ 1%
8. HI-POT : (@1250VAC, 1mA, 2 SEC.) PIN 1-4

						Atech [®] Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE 600 : 470 TRANSFORMER
							DWG. NO. ATS-138BR
A	ADD UL MARK	06/27 /2008	Pair	Willie	Eugene		
	RELEASE		PAIR		SUEDY	UNITS: M/M	SAFETY
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	SHEET 1 OF 1
REVISIONS						E159603 	DRAW Pair