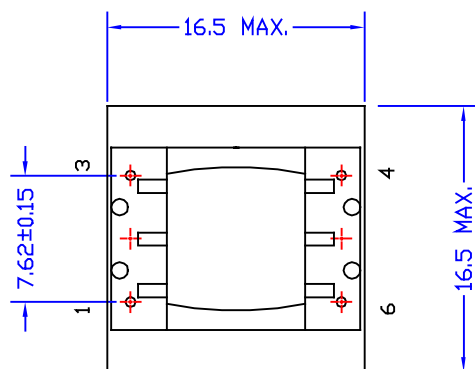
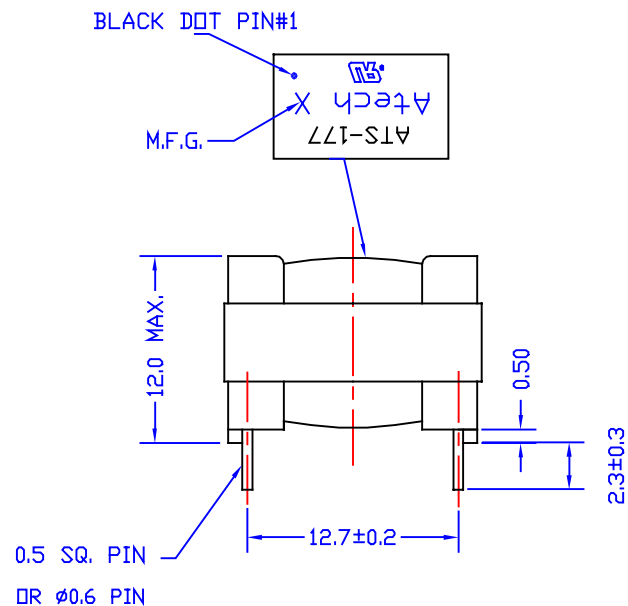


ELECTRICAL CHARACTERISTICS: (FOR V.34)

1. D.C.R. : PIN 1-3 = 150 OHM+/-10% PIN 6-4 = 150 OHM+/-10%
2. INDUCTANCE (@250HZ,1V_{rms}, PARALLEL): PIN 1-3 = 35H MIN.(40H TYP.)
3. RETURN LOSS : (REF. 600 OHM) 250 TO 4KHZ = 32dB MIN.
4. INSERTION LOSS : (1KHZ, 0dBm) 3+/-0.3dB
5. FREQ. RESPONSE: (REF. 1KHZ) 200 TO 4KHZ = +/-0.2dB
6. LONGITUDINAL BALANCE : 200HZ-4KHZ 80dB MIN.
7. TURN RATIO : (6KHZ, 0.1V_{rms}) PIN 1-3 : 6-4 = 1+/-1%
8. DISTORTION : @300HZ, -10dBm : -86dB MAX.
9. HI-POT : (@1250VAC, 1mA, 1MINUTE) PIN 1-6
10. LEAD-FREE

						Atech®		TITLE 600: 301 TRANSFORMER
						Atech Technology Co., Ltd.		DWG. NO. ATS-177N
						TEL:(02)2794-8667 FAX:(02)2794-8004		
RELEASE		05/27/2004	BART	KEVIN	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO	DESCRIPTION	DATE	BY	CHK	APPD	DATE	E159603	DRAW Pair
REVISIONS						05/27/04		