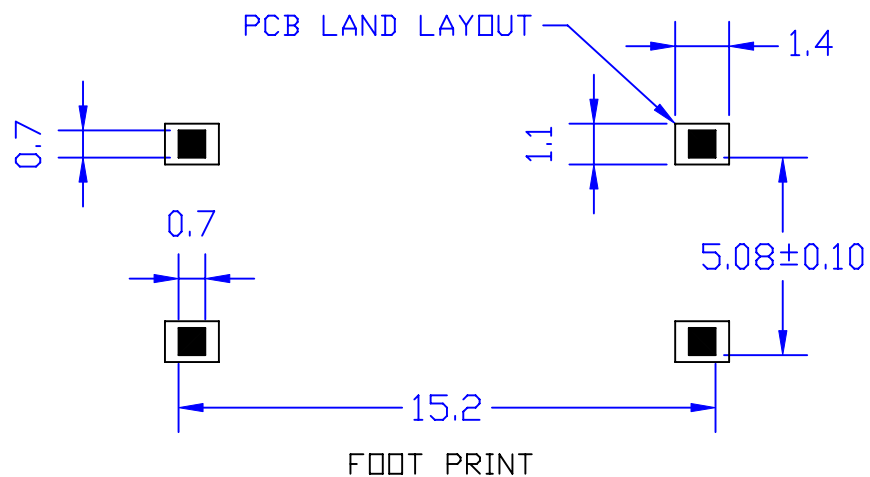
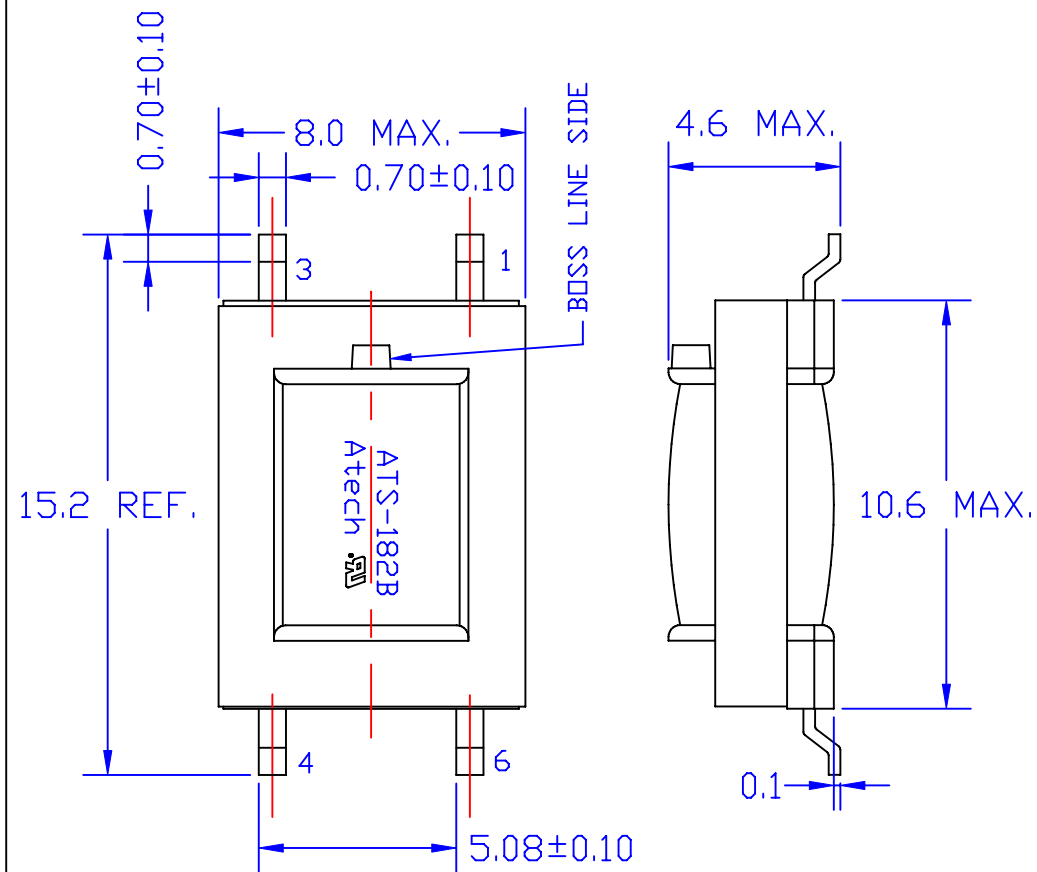


ELECTRICAL CHARACTERISTICS: (TRUE V.34 FOR SMT)

1. D.C.R. PIN 1-3 = 150 OHM +/-10% PIN 4-6 = 150 OHM +/-10%
2. INDUCTANCE (@250HZ, 0.5Vrms, PARALLEL) 1-3 = 4.0H MIN.
3. IMPEDANCE (@ 1KHZ, 0dBm, 6-4 W/H 301 OHM)
1-3 = 600 OHM+/-2%
4. INSERTION LOSS = 3.3 +/-0.25dB
(@ 1KHZ, 0dBm, W/H 301 OHM LOAD)
5. FREQ. RESP. (@300HZ TO 4KHZ, REF. 1KHZ) = +/-0.1dB
6. RETURN LOSS @300HZ = 30dB MIN. @1KHZ = 35dB MIN.
@4KHZ, = 35dB MIN.
- 7 TURN RATIO = 1:1 +/-1%
8. POLARITY = PIN 1-6 INPHASE
9. LONGITUDINAL BAL. = 70dB MIN. (@ 200HZ TO 4KHZ)
10. T.H.D (@600HZ, -10dBm) = -82dB MAX.
11. HI-POT = 1250 VAC, 1mA, 2SEC. (PRI.-SEC.)
12. LEAD-FREE

C	ADD PCB LAYOUT	09/19/2007	PAIR	AL	EUGENE	Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE	600 : 301 TRANSFORMER
B	4.6 MAX	07/05/2004	BART	AL	SUEDY		DWG. NO.	ATS-182BN
A	ADD UL	06/17/98	PAIR		SUEDY			
	RELEASE		PAIR		SUEDY	UNITS:	M/M	SAFETY
ND	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	CTP30800TA
REVISIONS						02/01/96		
								SHEET 1 OF 1
								DRAW <i>Pair</i>