
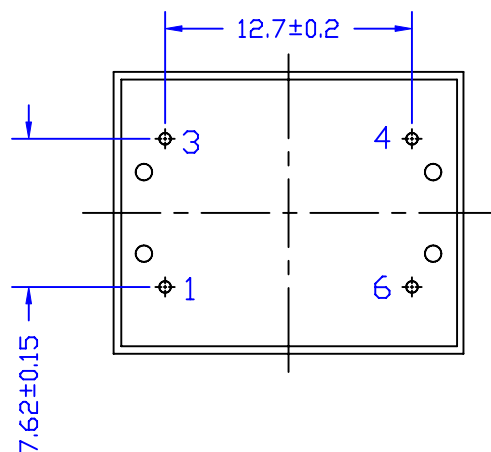
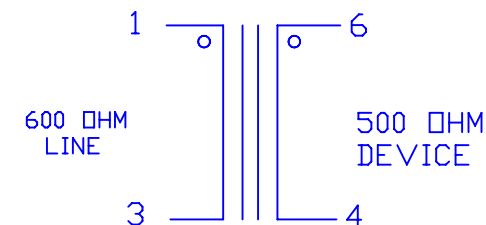
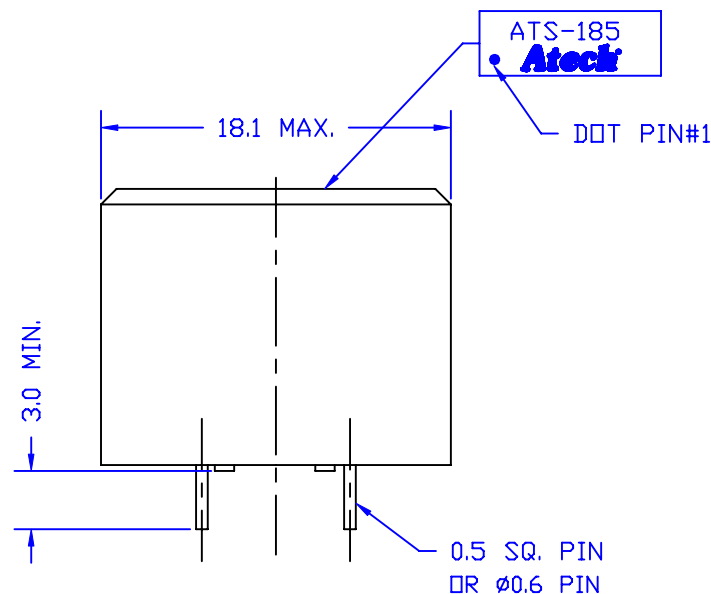


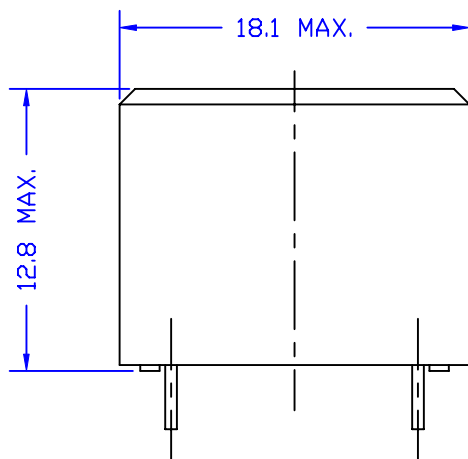

ELECTRICAL CHARACTERISTICS: (COMPATIBLE WITH 2781A)

1. D.C.R. : PIN 1-3 = 118 OHM MAX. PIN 4-6 = 122 OHM MAX.
2. INDUCTANCE (@200HZ 0.1Vrms, PARALLEL) : PIN 1-3 = 16H MIN.
3. RETURN LOSS : (REF. 600 OHM) @200HZ = 16dB MIN.
@1KHZ = 19.5dB MIN.
@4KHZ = 15dB MIN.
4. INSERTION LOSS : (@1KHZ, 0dBm) 2.0dB MAX.
5. FREQ. RESPONSE : (REF. 1KHZ) @200HZ = +/-0.08dB
@4KHZ = +/-0.08dB
6. LONGITUDINAL BALANCE : 200HZ-4KHZ 70dB MIN.
7. TURN RATIO : (@5KHZ, 1Vrms) PIN 1-3 : 6-4 = 1+/-1%
8. DISTORTION : 600HZ, -3dBm : -86dB MAX.
9. HI-POT : (3750 VAC, 1mA, 2SEC) PIN 1-6

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004	TITLE 600 : 500 TRANSFORMER	
B	ADD BAPT NO.	06/30/99	PAIR		SUEDY		DWG. NO. ATS-185	
A	Ø0.6 PIN	03/27/98	PAIR			UNITS: M/M		
	RELEASE	03/28/96	PAIR		SUEDY		SAFETY	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	SHEET 1 OF 1
REVISIONS						03/28/96	CTP316012A	DRAW Pair