

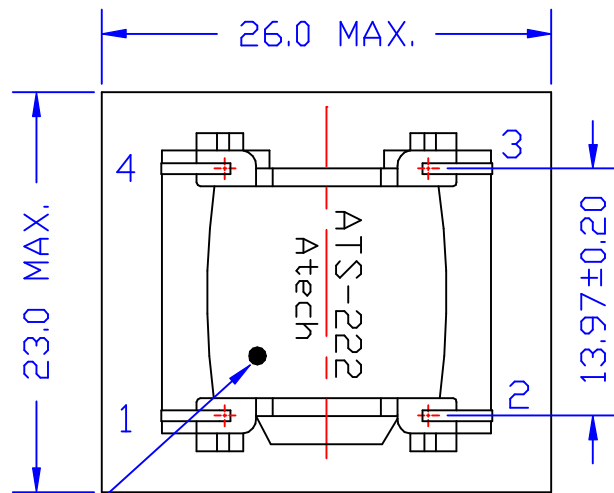
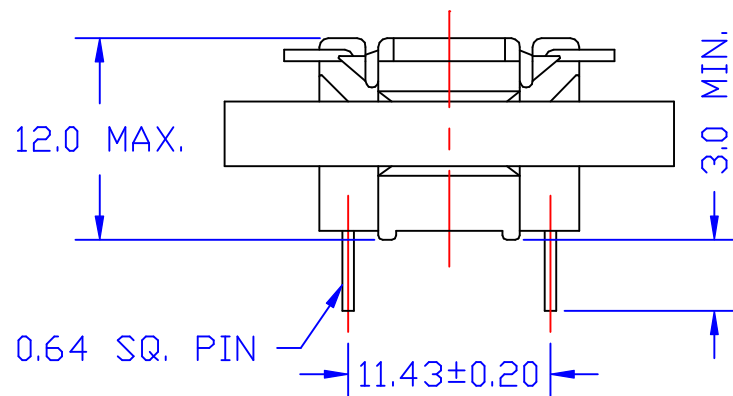


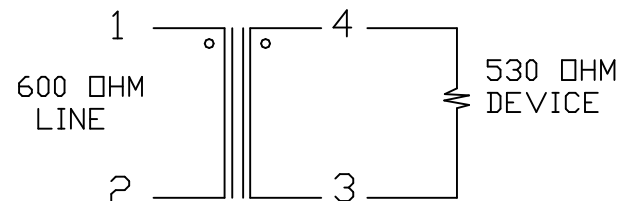

BLACK DOT PIN#1



ELECTRICAL CHARACTERISTICS: (671-9372 COMPATIBLE)

1. D.C.R. : PIN 1-2 = 45 OHM+/-10% PIN 3-4 = 41 OHM+/-10%
2. INDUCTANCE(@200HZ,1Vrms, SERIES) : PIN 1-2 = 3H MIN.
3. LEAKAGE INDUCTANCE(@200HZ, 1Vrms,SERIES) : PIN 1-2 = 3mH MAX.
4. RETURN LOSS : (REF. 600 OHM) @200-4KHZ = 25dB MIN.
5. INSERTION LOSS : (@1KHZ, 0dBm) 1.0dB MAX.
6. FREQ. RESPONSE : (REF. 1KHZ) 200 TO 4KHZ = +/-0.15dB
7. LONGITUDINAL BALANCE : 200HZ-4KHZ 65dB MIN.
8. TURN RATIO : (5KHZ, 0.1Vrms) PIN 1-2 : 4-3 = 1+/-1%
9. HI-POT : (@1250 VAC, 1mA 2SEC.) PIN 1-4
10. LEAD FREE

						Atech[®] Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE 600: 530 TRANSFORMER	
							DWG. NO. ATS-222N	
	RELEASE	02/23 /2005	BART	MICHAEL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						02/23/05		