
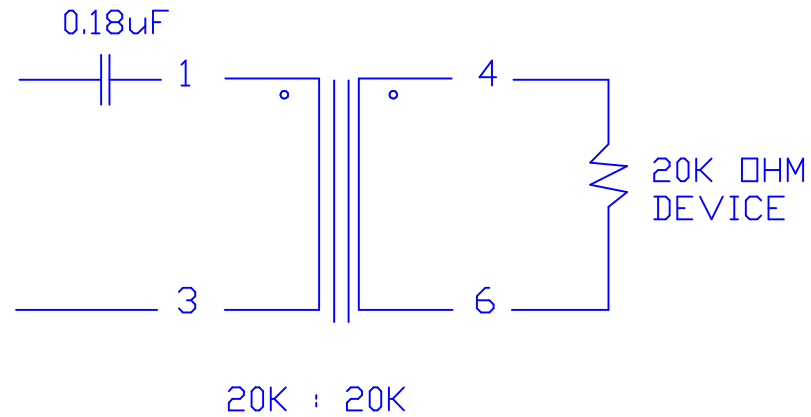
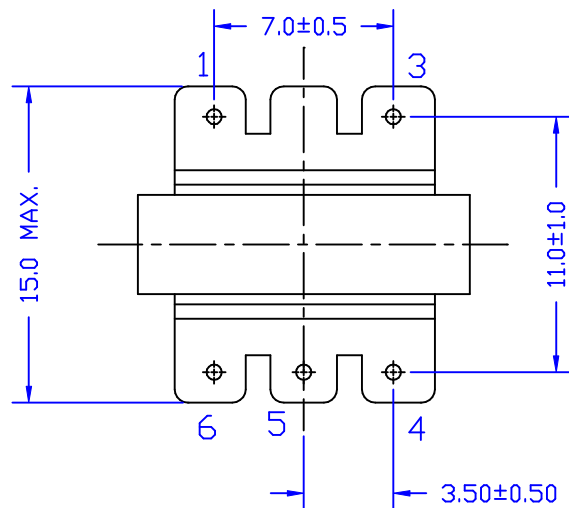


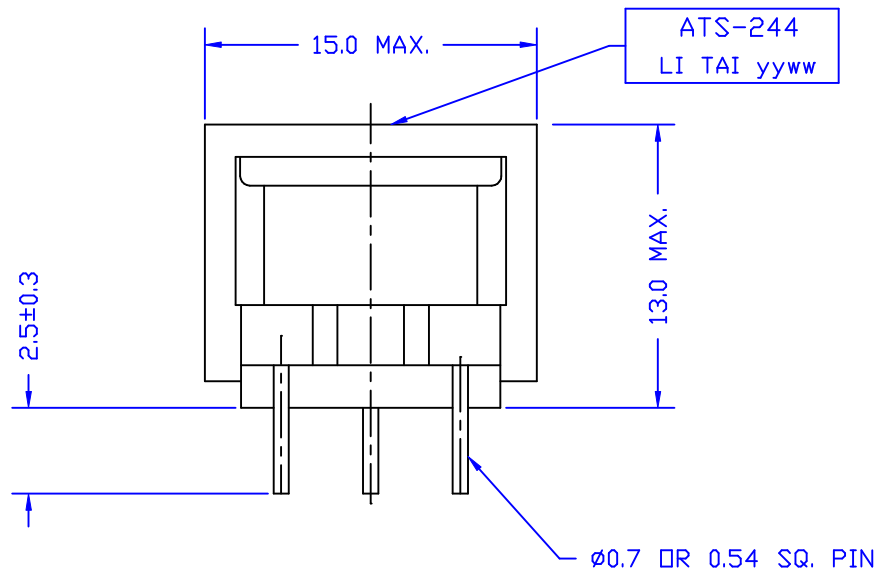

ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-3 = 1200 OHM MAX. PIN 4-6 = 1550 OHM MAX.
2. INDUCTANCE (@1KHZ, 1Vrms) : PIN 1-3 = 18H MIN.
3. IMPEDANCE (@1KHZ, 1Vrms, 4-6 W/H 20K OHM)
PIN 1-3 = 20K OHM+/-10%
4. INSERTION LOSS (@1KHZ, 1Vrms, 4-6 W/H 20K OHM) : 1.5dB MAX.
5. FREQ. RESP. (REF. 1KHZ) : @300HZ = +/-0.20dB
@4KHZ = +/-0.20dB
6. RETURN LOSS (REF. 20K OHM) : @200HZ = 25dB MIN.
@1KHZ = 25dB MIN. @4KHZ = 20dB MIN.
7. TURNS RATIO (@9KHZ, 10Vrms) : PIN 1-3 : 4-6 = 1+/-1%
8. HI-POT(@1200VAC, 1mA, 2SEC.) : PIN 1-4
9. ROHS COMPLIANT

					Atech®		TITLE 20K : 20K TRANSFORMER	
					Atech Technology Co., Ltd.		DWG. NO.	
					TEL:(02)2794-6667 FAX:(02)2794-8004		ATS-244BR	
RELEASE		05/15/2006	PAIR	SUEDY	UNITS:	SAFETY		SHEET 1 OF 1
NO. DESCRIPTION		DATE	BY	CHK	APPD	M/M		
REVISIONS					DATE	05/15/06	P/N: CTP314008A	DRAW Pair