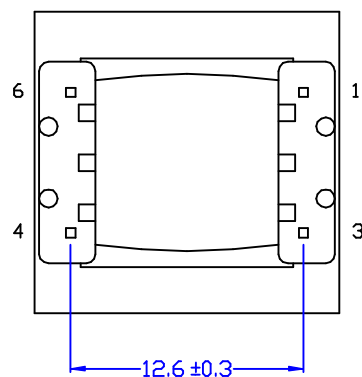
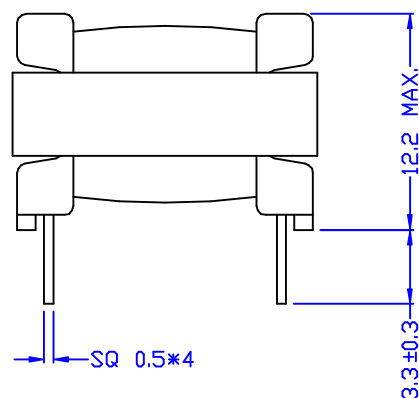
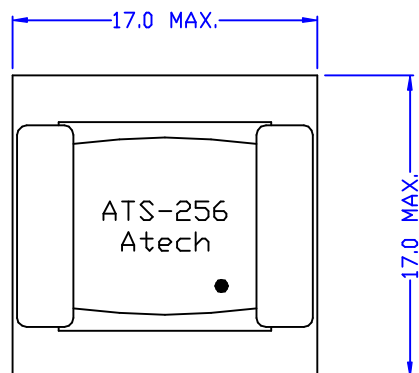


OPTIMUM CLASS (B) 600 OHM MATCH

ELECTRICAL CHARACTERISTICS : (FOR 56K MODEM)

1. DCR : PIN 1-3 = 4-6 = 150 OHM $\pm$ 10%
2. INDUCTANCE (@250HZ, 1Vrms, PARALLEL) :
PIN 1-3 = 35H MIN. (40H TYP.)
3. RETURN LOSS (REF. 600 OHM) : 250 TO 4KHZ = 32dB MIN.
4. INSERTION LOSS (@1KHZ, 0dBm) : 3 $\pm$ 0.3dB
5. FREQ. RESPONSE (REF. 1KHZ) : 200 TO 4KHZ = $\pm$ 0.2dB
6. LONGITUDINAL BALANCE : 200HZ - 4KHZ 80dB MIN.
7. TURN RATIO (@6KHZ, 0.1Vrms) : PIN 1-3 : PIN 6-4 = 1 $\pm$ 1%
8. DISTORTION (@300HZ, -10dBm) : -86dB MAX.
(@150HZ, -3dBm) : -80dB MAX.
9. HI-POT (@1250VAC, 1mA, 1MINUTE) : PIN 1-6

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE 600 : 301 TRANSFORMER	
								DWG. NO. ATS-256B	
	RELEASE	04/22/2002	DOLLY	AL	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 04/22/02			
REVISIONS									
								DRAW	Pair