
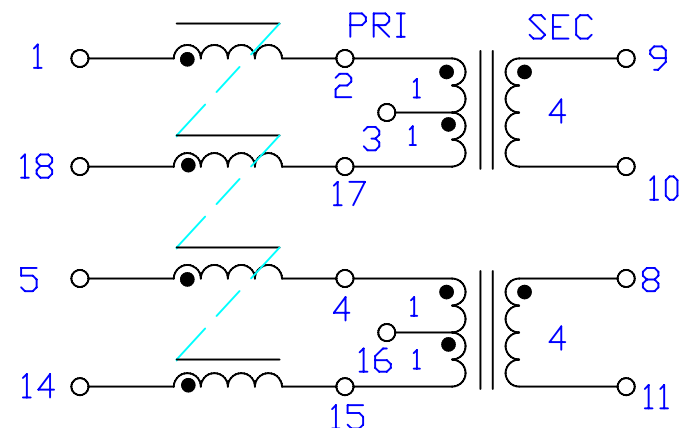
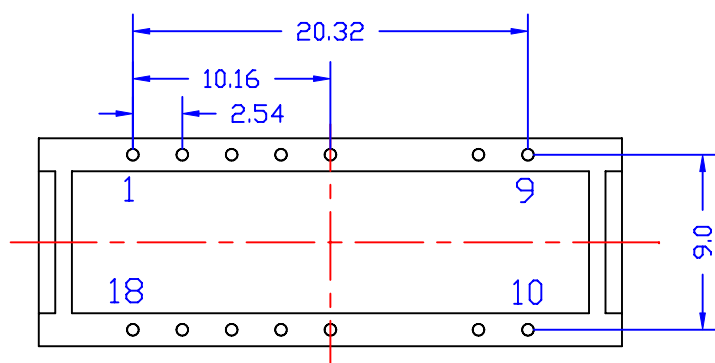
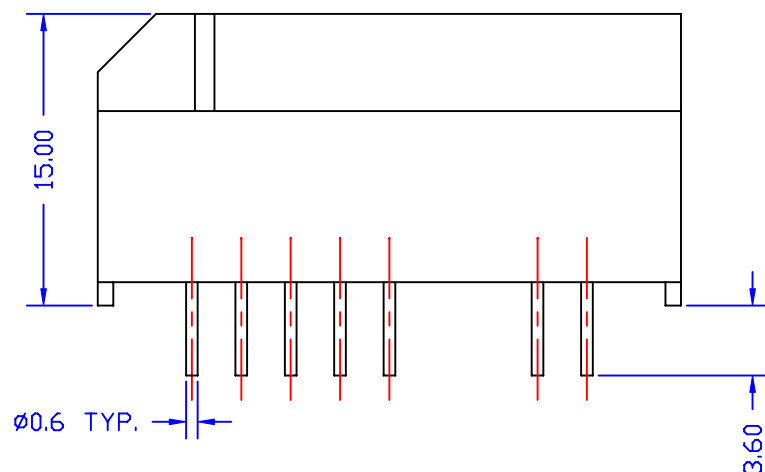


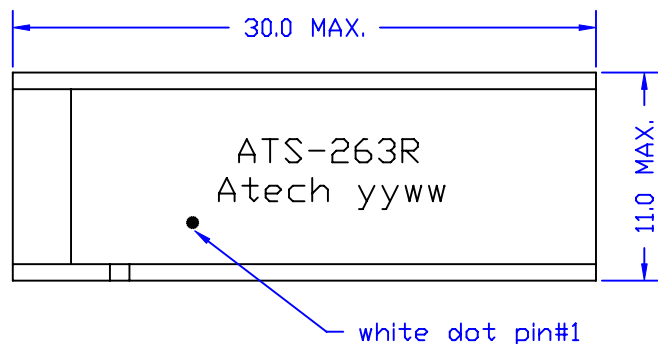

ELECTRICAL CHARACTERISTICS:

- D.C.R. : 2-17 = 4-15 = 4 Ω MAX.
9-10 = 8-11 = 5.5 Ω MAX.
1-2 = 17-18 = 4-5 = 14-15 = 1.3 Ω MAX.
- INDUCTANCE : (<10KHZ, 0.1Vrms)
2-17 = 4-15 = 30mH MIN.
1-2 = 17-18 = 4-5 = 14-15 = 5mH +50/-30%
- LEAKAGE INDUCTANCE : (<100KHZ, 0.1Vrms, 9-10,8-11 SHORT)
2-17 = 4-15 = 4uH MAX.
- CHOKE LEAKAGE INDUCTANCE : (<100KHZ, 0.1Vrms, 17-18, 14-15 SHORT)
1-2 = 4-5 = 0.6uH MAX.
- INTERWINDING CAP:(<10KHZ,0.1Vrms)
1-9 = 5-8 = 120pF MAX.
- TURNS RATIO : (<15KHZ, 0.1Vrms)
9-10 : 2-17 = 2+/-1%
8-11 : 4-15 = 2+/-1%
1-2 : 18-17 = 5-4 : 14-15 = 1+/-1%
- HI-POT : 2-9, 4-8 (@1500Vrms, 1mA 2SEC.)
3-16 (@500Vrms, 1mA,2SEC, 1-9, 5-8 SHORT)
- RoHS COMPLIANT

						Atech [®]		TITLE
						Atech Technology Co., Ltd.		ISDN SO MODULE
						TEL:(02)2794-6667 FAX:(02)2794-8004		DWG. NO.
								ATS-263R
RELEASE	01/17/2007	PAIR	WILLIE	SUEDY	UNITS:	SAFETY		SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	M/M		
REVISIONS						DATE	DRAW	
						01/17/07	Pair	