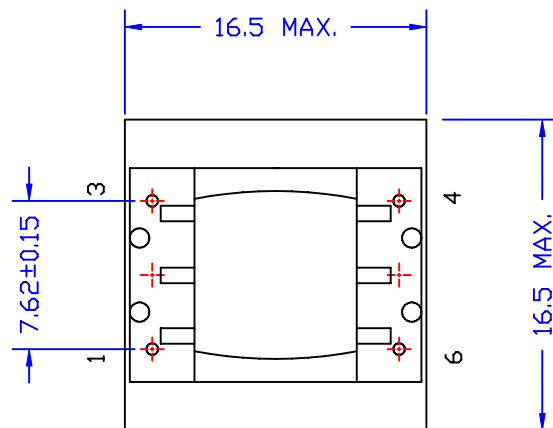


ELECTRICAL CHARACTERISTICS: (FOR 56Kbps)

1. D.C.R. : PIN 1-3 = 108 Ω M $\pm$ 10% PIN 4-6 = 120 Ω M $\pm$ 10%
2. INDUCTANCE (@200HZ, 1Vrms, PARALLEL) : PIN 1-3 = 18H MIN.
3. RETURN LOSS : (REF. 600 Ω M) 300 TO 3.5KHZ = 12dB MIN.
4. INSERTION LOSS : (1KHZ, 0dBm) 2.5dB MAX.
5. FREQ. RESPONSE: (REF. 1KHZ) 200 TO 4KHZ = $\pm$ 0.2dB
6. LONGITUDINAL BALANCE : 200HZ-4KHZ 70dB MIN.
7. TURN RATIO : (1KHZ, 1Vrms) PIN 1-3 : 4-6 = 1 $\pm$ 1%
8. DISTORTION : 300HZ, -10dBm : -83dB MAX.
150HZ, -3dBm : -75dB MAX.
9. HI-POT : (@3750VAC, 1mA, 2SEC.) PIN 1-6

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004	TITLE 600 : 374 TRANSFORMER	
B	POLARITY ; PIN	11/12 /2004	BART	AL	SUEDY		DWG. NO.	ATS-270
A	Ø0.6 PIN	03/31 /98	PAIR		SUEDY			
	RELEASE		PAIR		SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						11/27/97		