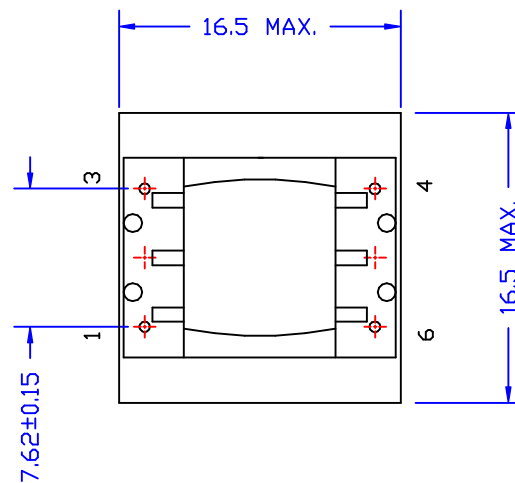
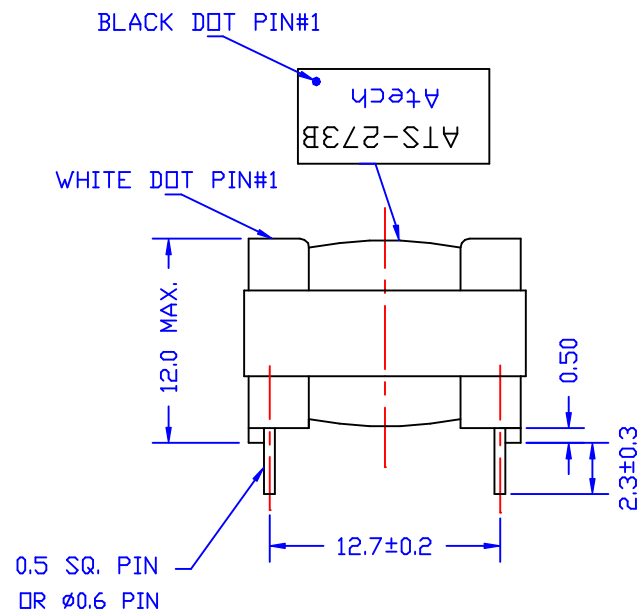


ELECTRICAL CHARACTERISTICS: (FOR 56Kbps, 2811B COMPATIBLE)

1. D.C.R. : PIN 1-3 = 120 OHM+/-10% PIN 6-4 = 120 OHM+/-10%
2. INDUCTANCE (@200HZ, 1Vrms, PARALLEL) : PIN 1-3 = 16.5H MIN.
3. RETURN LOSS : (REF. 600 OHM) 200 TO 3.5KHZ = 25dB MIN.
4. INSERTION LOSS : (1KHZ, 0dBm) 2.1 dB TYP.
5. FREQ. RESPONSE: (REF. 1KHZ) 100 TO 4KHZ = +/-0.1dB
6. LONGITUDINAL BALANCE : 200HZ-3.5KHZ 60dB MIN.
7. TURN RATIO : PIN 1-3 : 6-4 = 1+/-1%
8. HI-POT : (@1650VAC, 1mA, 2SEC.) PIN 1-6

						Atech [®] Atech Technology Co., Ltd. TEL:02)2794-6667 FAX:02)2794-8004	TITLE 600 : 360 TRANSFORMER	
							DWG. NO. ATS-273B1	
	RELEASE	09/19/2003	RDRY	SUEDY	SUEDY	UNITS: M/M	SAFETY	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		
REVISIONS						09/19/03	DRAW <i>Pair</i>	