
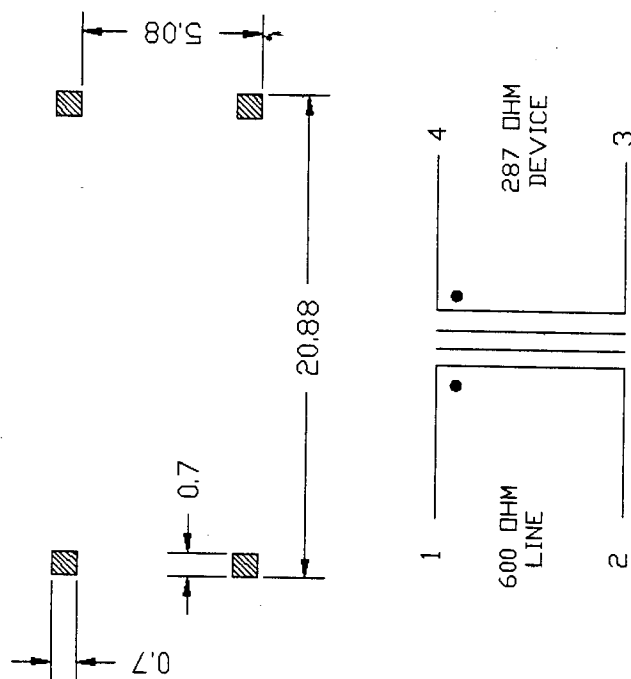


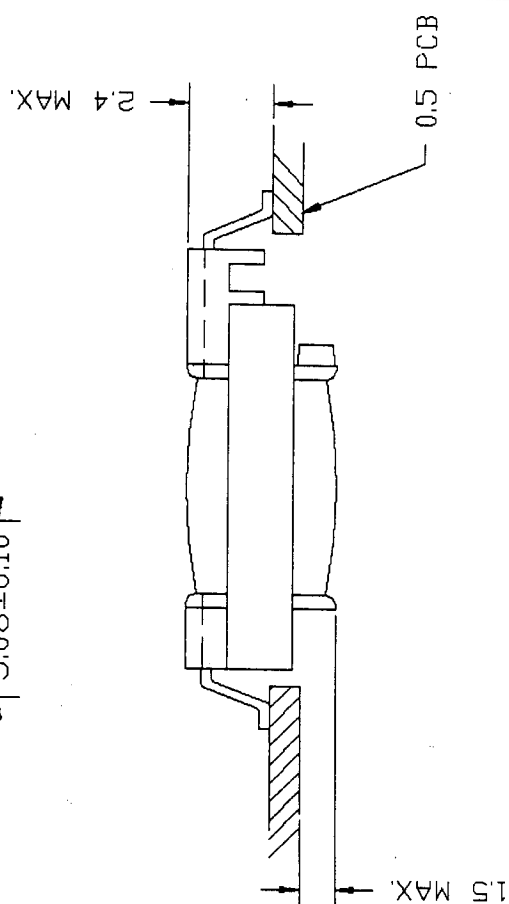

ELECTRICAL CHARACTERISTICS: (671-8481, COMPATIBLE, MEET UL 1950)

1. D.C.R. : PIN 1-2 = 155 OHM +/ -10% PIN 3-4 = 145 OHM +/ -10%
2. INDUCTANCE (@1KHZ, 1Vrms) : PIN 1-2 = 3Hy MIN.
3. INSERTION LOSS (@ 1KHZ, 0dBm, PIN 3-4 W/H 287 OHM)
PIN 1-2 = 3.5 dB MAX.
4. FREQ. RESP.(REF. 1KHZ) : @200HZ-4KHZ = +/-0.3dB
5. RETURN LOSS (REF. 600 OHM) : @ 200HZ - 4KHZ = 20dB MIN.
- 5.5. TURNS RATIO : PIN 1-2 : PIN4-3 = 1+/-1%
7. LONGITUDINAL BAL. = 60dB MIN.(@200-4KHZ)
3. T.H.D. (@600HZ,-10dBm) = -82dB MAX,
3. HI-POT (@1650VAC, 1mA, 2SEC.) PRI. - SEC.

[illegible]