
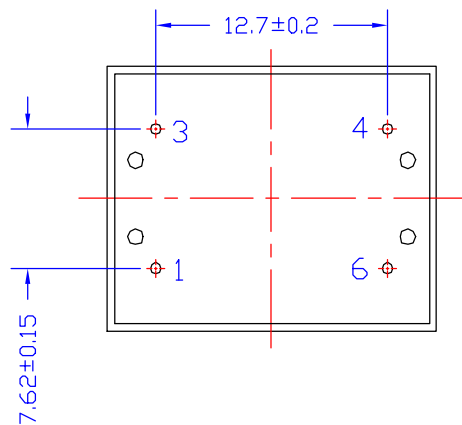
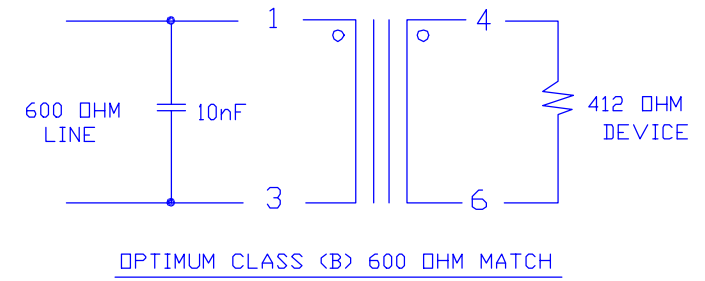
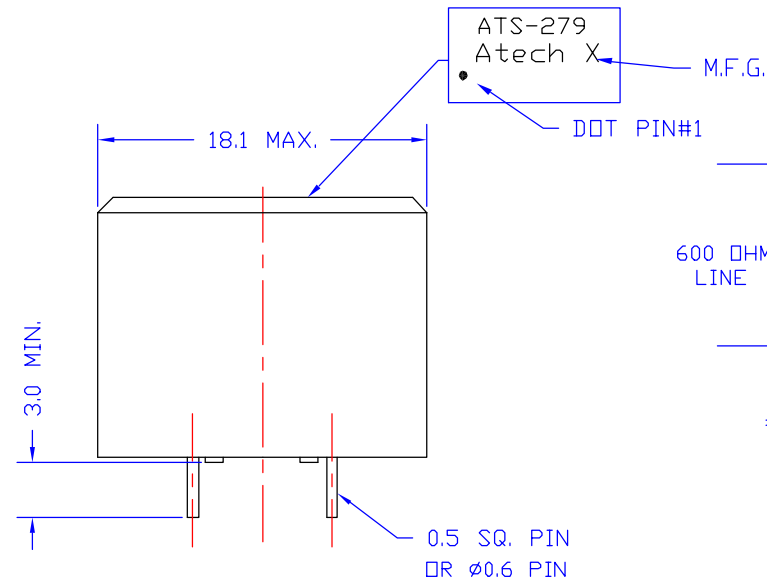


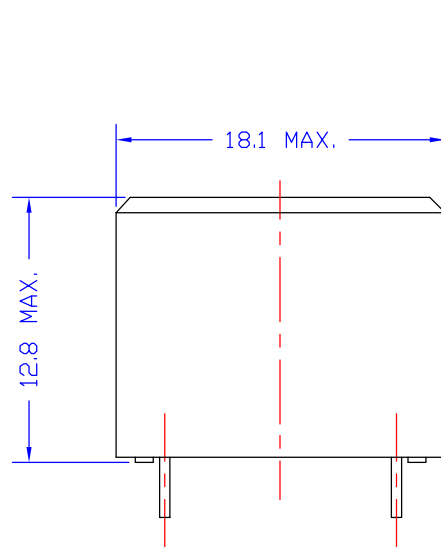

ELECTRICAL CHARACTERISTICS: (COMPATIBLE CWC9035 COMPATIBLE)

1. D.C.R. : PIN 1-3 = 86 OHM +/-15% PIN 6-4 = 108 OHM +/-15%
2. INDUCTANCE (@1KHZ, 1Vrms, SERIES) : PIN 1-3 = 4.5H MIN.
3. RETURN LOSS : (REF. 600 OHM) 200 ID 4KHZ =30dB MIN.
4. INSERTION LOSS : (@1KHZ, 0dBm 600 OHM LOAD) 1.4dB MAX.
5. FREQ. RESPONSE : (REF. 1KHZ) @100HZ = +/-0.1dB @4KHZ = +/-0.05dB
6. LONGITUDINAL BALANCE : (200HZ-4KHZ) 70dB MIN.
7. TURN RATIO : (@6KHZ, 1Vrms) PIN 1-3 : 4-6 = 1+/-1%
8. T.H.D. (@600HZ, -10dBm) = -80dB MAX.
(@200HZ, -3dBm) = -75dB MAX.
9. HI-POT : (@3000 VAC, 1mA, 2SEC) PIN 1-6
10. RoHS COMPLIANCE

					Atech [®]		TITLE 600: 412 TRANSFORMER	
					Atech Technology Co., Ltd.		DWG. NO.	
					TEL:(02)2794-6667 FAX:(02)2794-8004		ATS-279R	
RELEASE		09/02/2005	BART	VINCENT	SUEDY	UNITS: M/M	SAFETY	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	CRC0061	
REVISIONS						09/02/05	SHEET 1 OF 1	
							DRAW Pair	