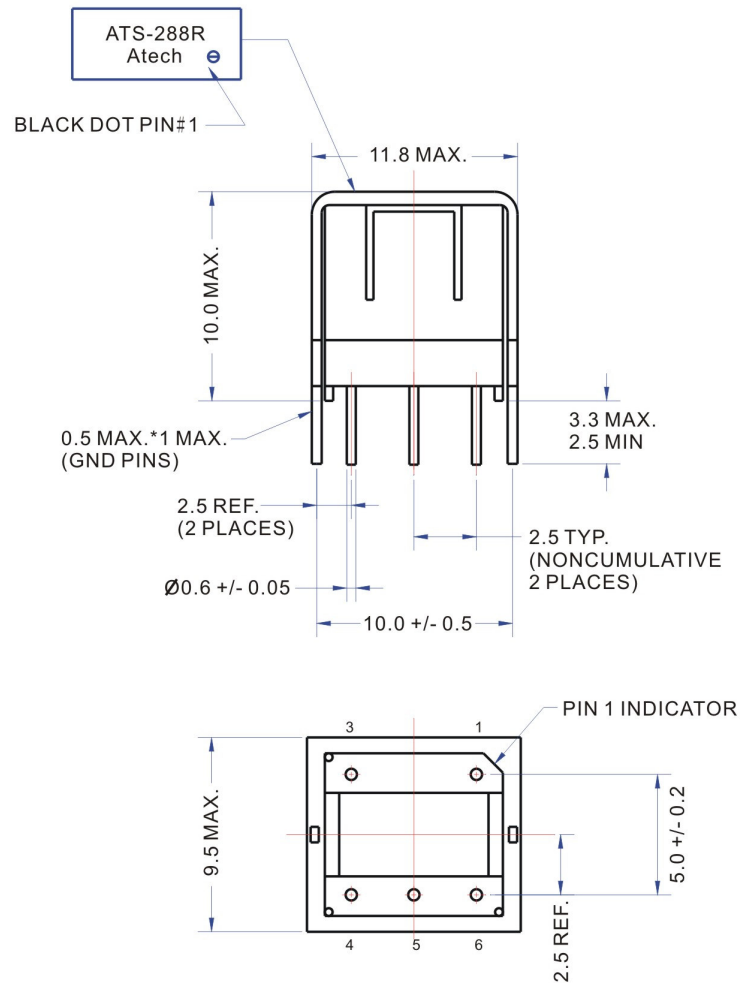


ELECTRICAL CHARACTERISTICS :

- 1.D.C.R : PIN 1-3 = 460mOHM MAX.
PIN 4-6 = 650mOHM MAX.
- 2.INDUCTANCE(@1KHZ , 0.1Vrms , LS) : PIN 1-3 = 1.5mH MIN.
- 3.INSERTION LOSS(@1.544MHZ , -10dBm , 120 OHM LOAD) :
PIN 1-3 = 0.25dB MAX.
- 4.FREQ. RESP(REF. 1.544MHZ)
@20KHZ = +/- 0.25dB @3MHZ = +/- 0.25dB.
- 5.RETURN LOSS(REF. 75 OHM , @1.544MHZ) :
PIN 1-3 = 20dB MIN.
- 6.TURN RATIO(@10KHZ , 0.1Vrms) :
6-4 : 1-3 = 1.263 +/- 1%.
- 7.HI-POT (@1KVAC , 1mA , 2SEC) : PRI-SEC.
- 8.RoHS COMPLIANT.

						Atech® Atech Technology Co., Ltd. TEL: (02)2794-6667 FAX: (02)2794-8004		TITLE 75 : 120 T1 / EI TRANSFORMER	
								DWG NO. ATS-288R	
	RELEASE	08/25 /2008	Isaac	Willie	Eugene	UNITS	SAFETY		SHEET
						M/M			1 / 1
NO.	DESCRIPTION	DATE	BY	CHK	APP	DATE			DRAW
REVISIONS						20080825			Isaac