
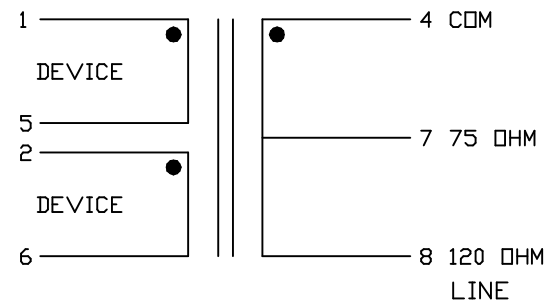
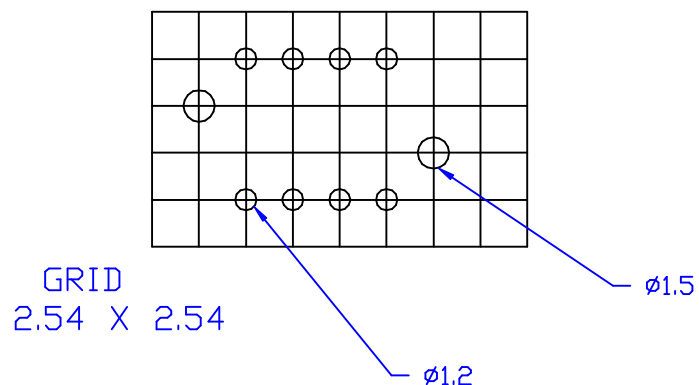
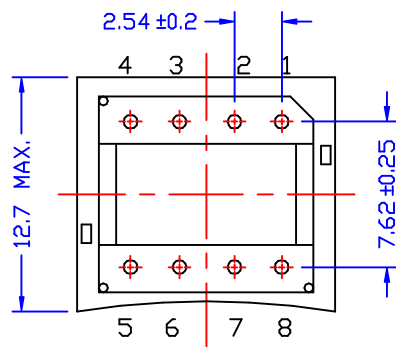


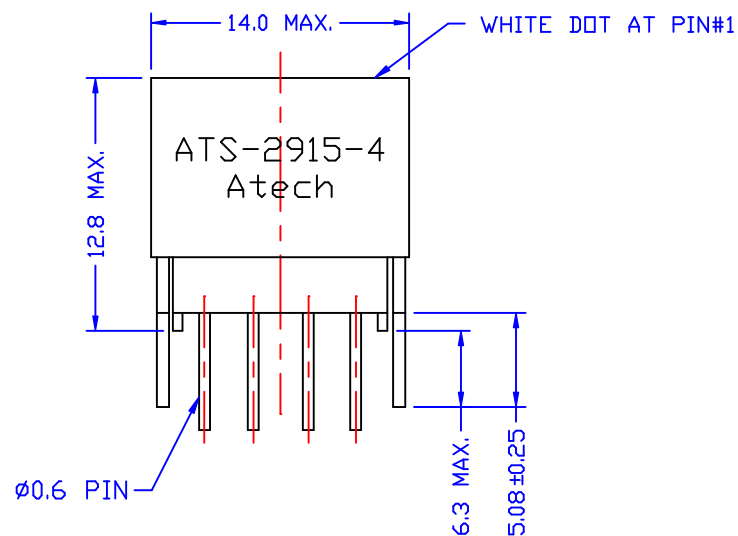

ELECTRICAL CHARACTERISTICS :

(FOR MITEL MT8978, MH89780, MT8979, MH89791, E1 INTERFACE)

1. D.C.R. : PIN 4-8 = 0.11 OHM ± 15%
PIN 1-5 = 2-6 = 1.8 OHM ± 15%
2. INDUCTANCE (@10KHZ, 1Vrms) : PIN 4-8 = 810uH +30% -20%
3. Q VALUE (@10KHZ, 0.1Vrms) : PIN 4-8 = 20 MIN.
4. WINDING CAPACITANCE (@10KHZ, 0.1Vrms) : PIN 1-2 = 100pF MAX.
PIN 1-4 = 15pF MAX.
5. LEAKAGE (@10KHZ, 0.1Vrms, W/H PIN 1-2-5-6 SHORT) :
PIN 4-8 = 1.8uH MAX
6. TURN RATIO : PIN 1-5 : 4-8 = 1.95
PIN 1-5 : 4-7 = 2.5
PIN 1-5 : 2-6 = 1
7. HI-POT (@1500VAC, 1mA, 1MINUTE) : PRI-SEC-CORE

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE CEPT OUTPUT TRANSFORMER	
A	DCR	12/11/2001	DOLLY	AL	SUEDY			DWG. NO. ATS-2915-4	
	RELEASE	09/28/2001	DOLLY	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 09/28/01		DRAW <i>Pair</i>	
REVISIONS									