
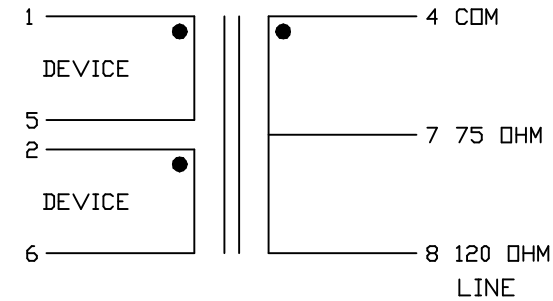
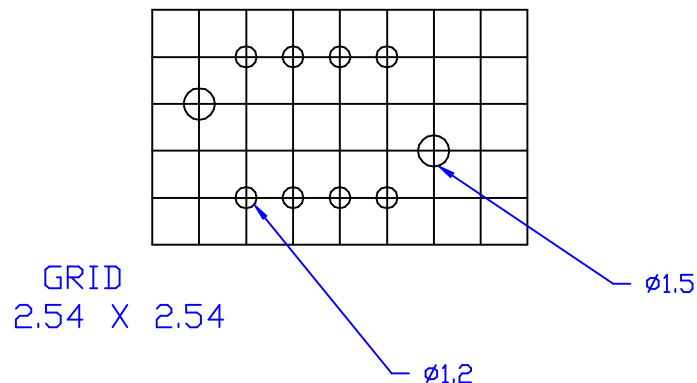
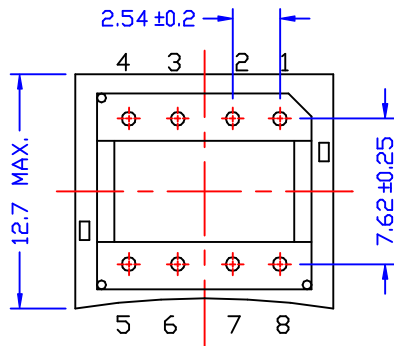


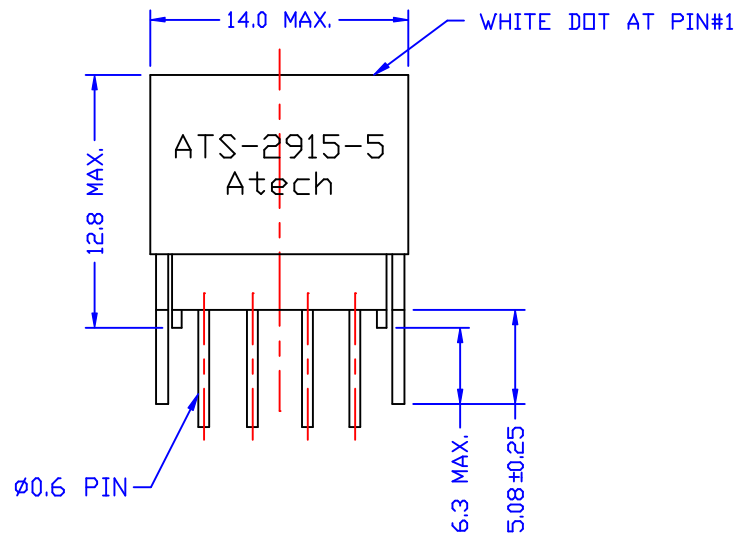

ELECTRICAL CHARACTERISTICS :

(FOR MITEL MT89790B E1 INTERFACE)

1. D.C.R. : PIN 4-8 = 0.147 OHM ± 15%
PIN 1-5 = 2-6 = 1.4 OHM ± 15%
2. INDUCTANCE (@10KHZ, 1Vrms) : PIN 4-8 = 1mH MIN.
3. LEAKAGE INDUCTANCE (10KHZ, 0.1Vrms, W/H, 1-5, 2-6 SHORT) :
PIN 4-8 = 5uH MAX.
4. INTERWINDING CAP. (@10KHZ, 0.1Vrms) : PIN 1-2 = 100pF MAX.
PIN 1-4 = 30pF MAX.
5. TURN RATIO (@10KHZ, 1Vrms) PIN 1-5 : 2-6 = 1±1%
PIN 1-5 : 4-7 = 1±1%
PIN 4-8 : 1-5 = 1.33±1%
6. HI-POT : (@1500VAC, 1mA, 1SEC) PIN 4-1, 4-2, 4-CORE

						Atech®		TITLE CEPT OUTPUT TRANSFORMER	
						Atech Technology Co., Ltd.		DWG. NO. ATS-2915-5	
						TEL:022794-6667 FAX:022794-8004			
RELEASE		06/13/2003	RDRY	AL	SUEDY	UNITS: M/M		SAFETY	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						06/13/03		DRAW Pair	