
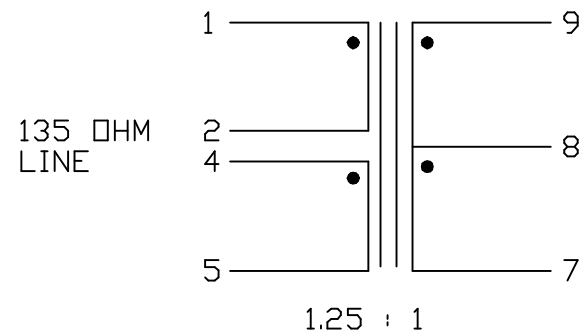
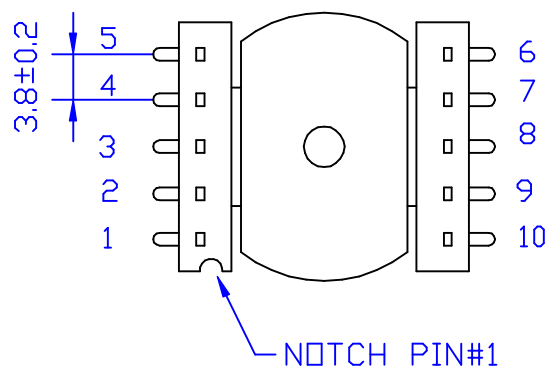
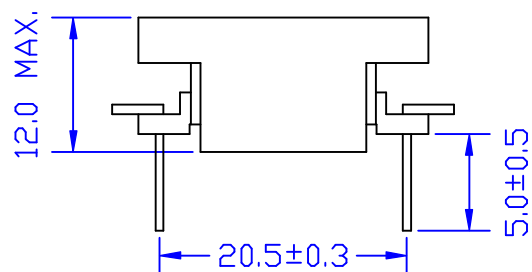


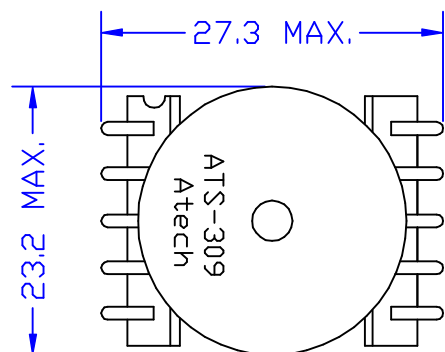

ELECTRICAL CHARACTERISTICS : <PE-68628 COMPATIBLE>

- DCR : PIN 1-5 (2-4 SHORT) = 12 OHM MAX.
PIN 7-9 = 7 OHM MAX.
- INDUCTANCE (@10KHZ, 0.1Vrms, W/H 80mADC) :
PIN 1-5 (2-4 SHORT) = 28mH $\pm$ 5.5%
- LEACKAGE INDUCTANCE (@10KHZ, 0.1Vrms,) :
PIN 7-9 (2-4 1-5 SHORT) = 120uH MAX.
- INTERWINDING CAP. (@10KHZ, 0.1Vrms) :
PIN 1-9 (2-4 SHORT) = 100pF MAX.
- URNS RATIO (@90KHZ, 1Vrms, 2-4 SHORT) :
PIN 1-5 : PIN 9-7 = 1.25 $\pm$ 1%
- HI-POT (@1500VAC, 1mA, 2SEC) : PRI-SEC
- LEAD FREE.

						Atech® Atech Technology Co., Ltd. TEL:02/2794-6667 FAX:02/2794-8004		TITLE ISDN-U TRANSFORMER	
								DWG. NO. ATS-309N	
	RELEASE	02/16/2005	BART	MICHAEL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS						02/16/05			