
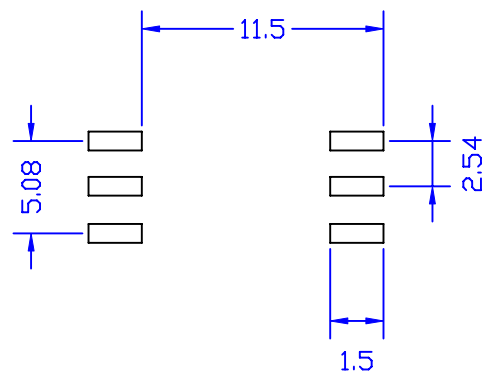
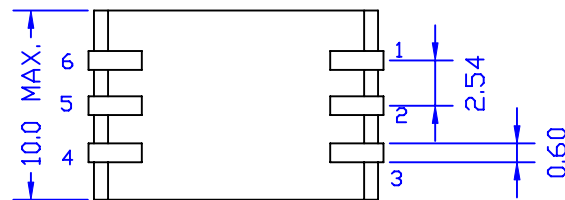
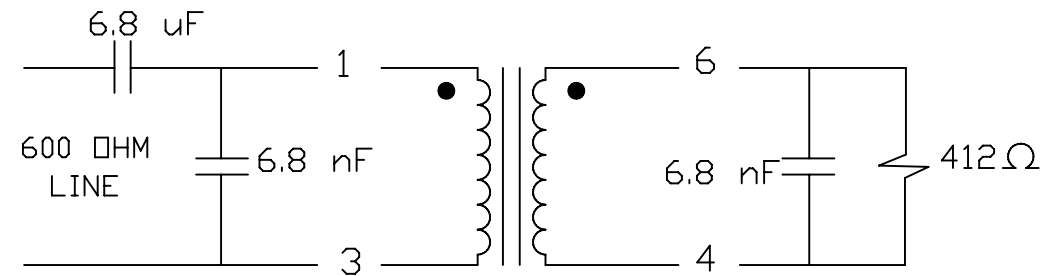


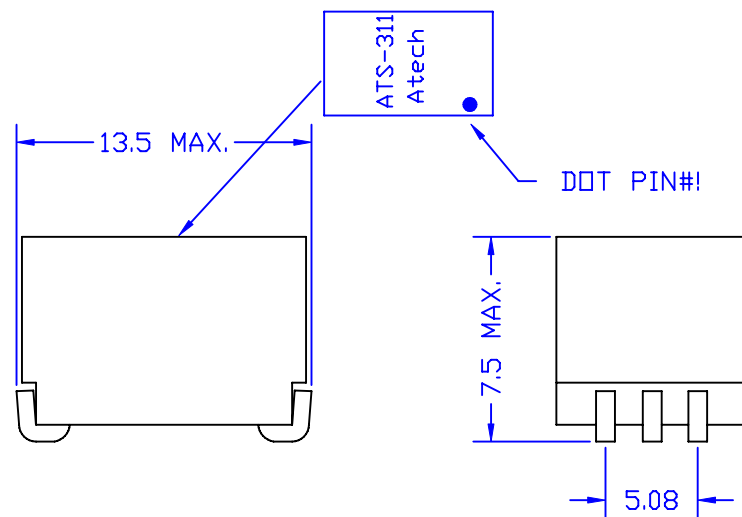

ELECTRICAL CHARACTERISTICS (P2781 COMPATIBLE)

- DCR: 1-3 = 6-4 = 112 OHM +/- 10%
- INDUCTANCE (@1KHZ, 0.1Vrms, PARALLEL)
1-3 = 1.6H MIN.
- INSERTION LOSS (@2KHZ, 1Vrms) : 2dB MAX.
- FREQ. RESPONSE (REF. 2KHZ)
@200HZ = +/- 0.2dB @4KHZ = +/- 0.1dB.
- RETURN LOSS (REF. 600 OHM)
@200HZ = 18dB MIN. @4KHZ = 24dB MIN.
- TURN RATIO (@1KHZ, 1Vrms) 1-3 = 6-4 = 1+/-1%
- HI-POT (@3750VAC, 1mA, 2SEC) PRI-SEC.
- WORKING TEMP. : -10°C TO +70°C

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE TRANSFORMER	
B	WORKING TEMP.	09/02/2003	PAIR	AL	SUEDY		DWG. NO. ATS-311	
A	CHANGE CHAMFER TO DOT	04/06/99	PAIR		SUEDY			
	RELEASE	09/10/98	PAIR		SUEDY			
NO.	DESCRIPTION	DATE	BY	CHK	APPD	UNITS: M/M	SAFETY	SHEET 1 OF 1
						DATE 09/09/98	P/N: CTP308001A	DRAW <i>Pair</i>
REVISIONS								