

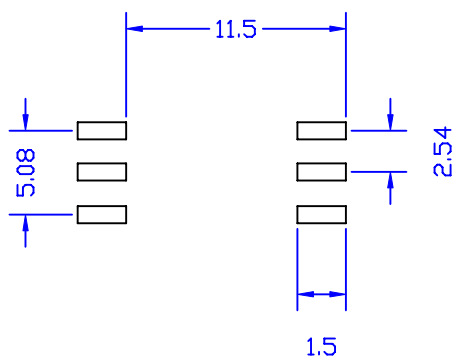
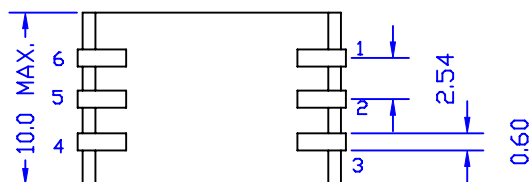


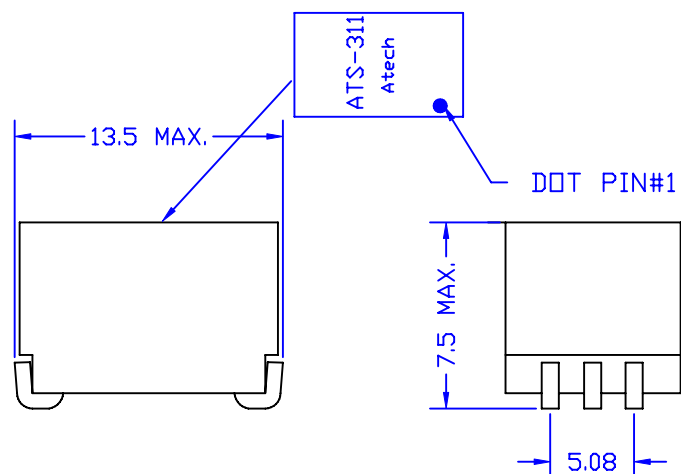

NONE TOLERANCE FOR REFERENCE

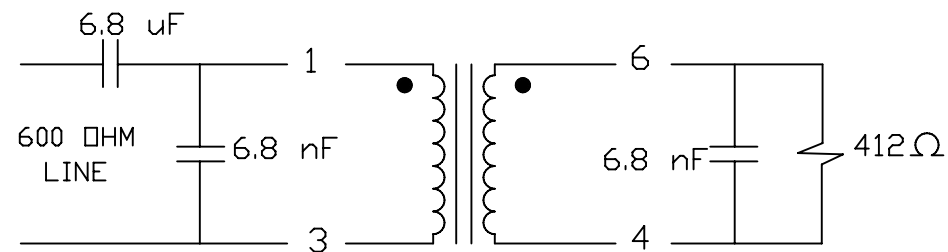

## ELECTRICAL CHARACTERISTICS (P2781 COMPATIBLE)

1. DCR: 1-3 = 6-4 = 112 OHM +/- 10%
2. INDUCTANCE ( @1KHZ, 0.1Vrms, PARALLEL )  
1-3 = 1.6H MIN.
3. INSERTION LOSS ( @2KHZ, 1Vrms ) : 2dB MAX.
4. FREQ. RESPONSE ( REF. 2KHZ )  
@200HZ = +/- 0.2dB @4KHZ = +/- 0.1dB.
5. RETURN LOSS ( REF. 600 OHM )  
@200HZ = 18dB MIN. @4KHZ = 24dB MIN.
6. TURN RATIO ( @1KHZ, 1Vrms ) 1-3 = 6-4 = 1+/-1%
7. HI-POT ( @3750VAC, 1mA, 2SEC ) PRI-SEC.
8. WORKING TEMP. : -10°C TO +70°C
9. LEAD-FREE

|           |             |            |      |     |        |                                     |            |              |
|-----------|-------------|------------|------|-----|--------|-------------------------------------|------------|--------------|
|           |             |            |      |     |        | <b>Atech®</b>                       |            | TITLE        |
|           |             |            |      |     |        | Atech Technology Co., Ltd.          |            | TRANSFORMER  |
|           |             |            |      |     |        | TEL:(02)2794-6867 FAX:(02)2794-8004 |            | DWG. NO.     |
|           |             |            |      |     |        |                                     |            | ATS-311N     |
| A         | DELITE MFG  | 08/18/2006 | PAIR |     | EUGENE | UNITS:                              | SAFETY     | SHEET 1 OF 1 |
|           | RELEASE     | 08/02/2004 | BART | AL  | SUEDY  | M/M                                 |            |              |
| NO.       | DESCRIPTION | DATE       | BY   | CHK | APPD   | DATE                                | P/N:       | DRAW         |
| REVISIONS |             |            |      |     |        | 08/02/04                            | CTP308002A | Pair         |