

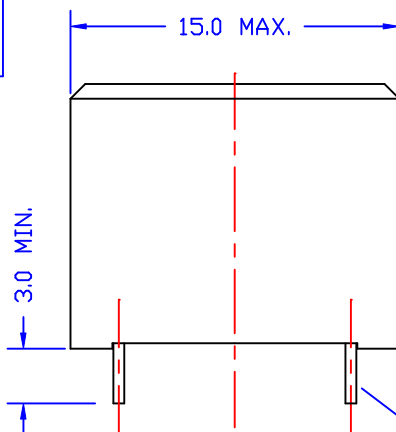
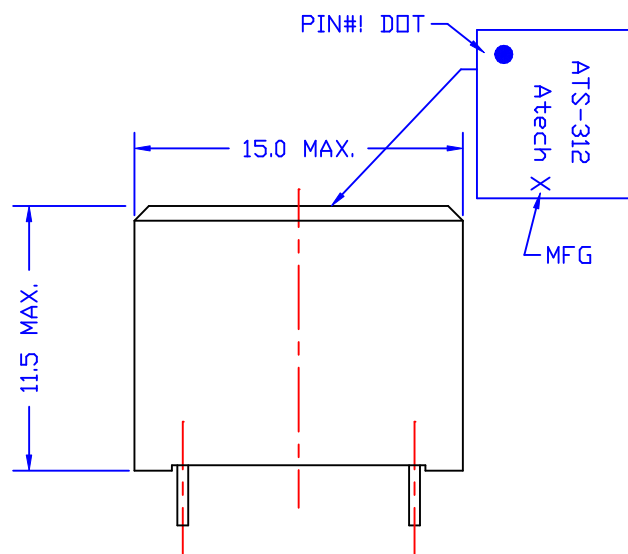


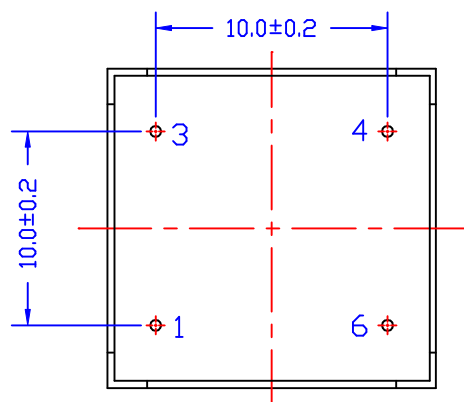

0.5 SQ. PIN
OR Ø0.6 PIN

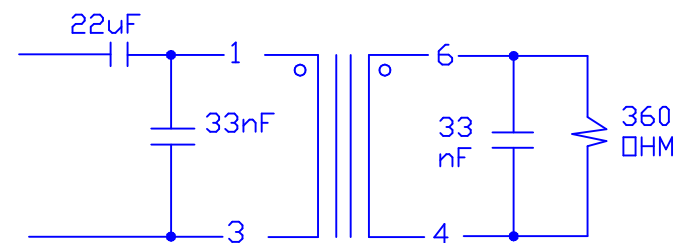

ELECTRICAL CHARACTERISTICS: (P3156 COMPATIBLE)

1. DCR: 1-3 = 140 OHM +/-10% , 4-6 = 140 OHM +/-10%
2. PARALLEL INDUCTANCE (@200HZ, 0.1Vrms) 1-3 = 10H TYP.
3. INSERTION LOSS (@2KHZ, 0dBm) 1-3 = 3dB MAX.
4. FREQ RESPONSE (REF. 2KHZ) @100HZ-4KHZ = +/-0.2dB
5. TURNS RATIO (@7KHZ, 1Vrms) 1-3 = 6-4 = 1+/-1%
6. H1-POT (@3750VAC, 1mA, 2SEC) PRI-SEC.
7. LEAD-FREE

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE 600 : 360 TRANSFORMER		
							DWG. NO. ATS-312N		
	RELEASE	11/19/2004	PAIR	AL	SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW <i>Pair</i>
REVISIONS						11/19/04			