

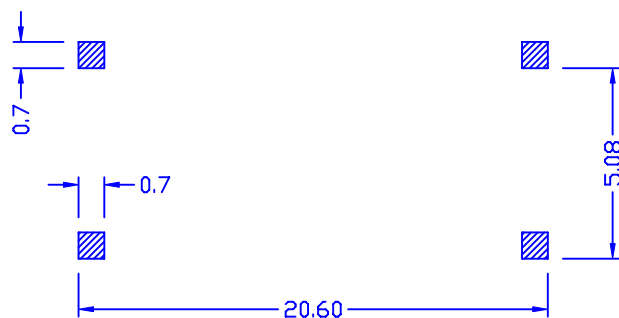
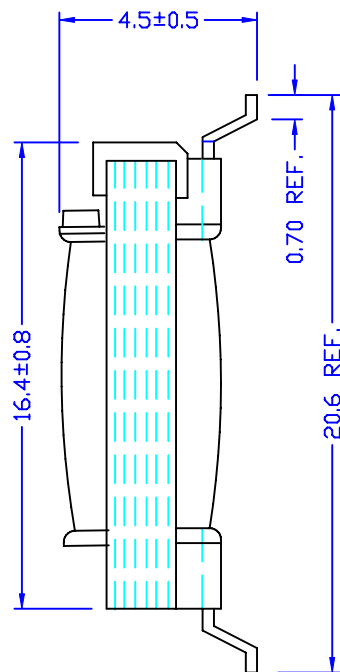
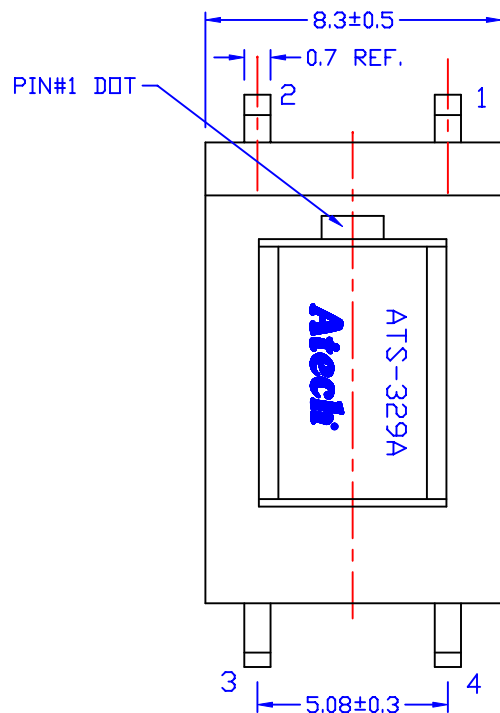


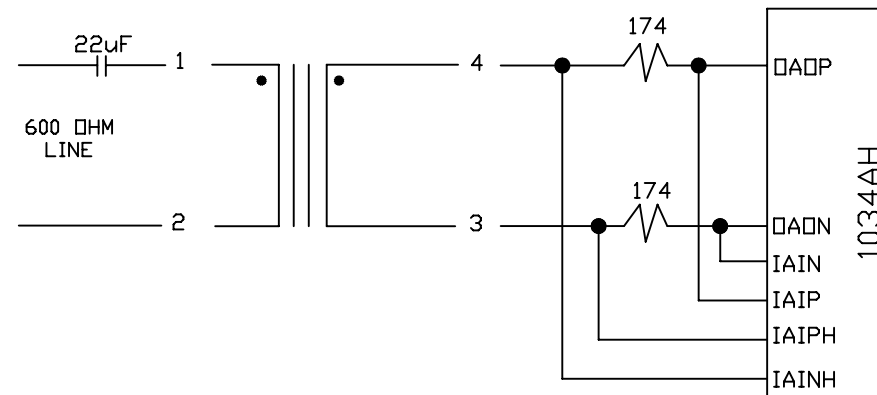

FOOT PRINT

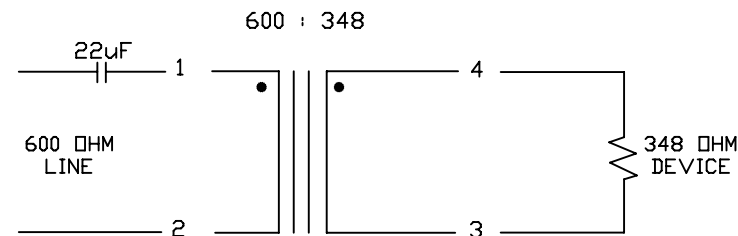

ELECTRICAL CHARACTERISTICS :

(FOR 1034AH V.90, MEET IEC 950)

1. D.C.R. : PIN 1-2 = 135 OHM MAX.
PIN 3-4 = 160 OHM MAX.
2. INDUCTANCE (@1KHZ, 1Vrms LP) : PIN 1-2 = 2.5Hy MIN.
3. INSERTION LOSS (@1KHZ, 0dBm) : PIN 1-2 = 3.0dB MAX.
4. FREQ. RESP. (REF. 1KHZ) : @200HZ-4KHZ = ± 0.15 dB
5. RETURN LOSS (REF. 600 OHM) : @200HZ = 30dB MIN.
@1KHZ = 30dB MIN.
@4KHZ = 20dB MIN.
6. TURNS RATIO : PIN 1-2 : PIN 4-3 = $1 \pm 1\%$
7. LONGITUDINAL BAL. = 60dB MIN. (@200-4KHZ)
8. T.H.D. (@600HZ, -10dBm) = -78dB MAX.
9. HI-POT (@1650VAC, 1mA, 2SEC.) PRI. - SEC.
10. LEAD-FREE.

G	foot print	12/11/2006	PAIR		EUGENE	Atech® Atech Technology Co. Ltd. TEL:02)2794-6667 FAX:02)2794-8004	TITLE	1034AH TRANSFORMER
F	ADD TOLERANC	11/30/2006	PAIR		EUGENE		DWG. NO.	ATS-329AN
E	DELET MFG	10/26/2006	PAIR	WILLIE	EUGENE			
	RELEASE	12/20/2004	BART	AL	SUEDY	UNITS:		
NO	DESCRIPTION	DATE	BY	CHK	APPD	M/M	SAFETY	SHEET 1 OF 1
REVISIONS						DATE	P/N	DRAW
						12/20/04	CTP308004A	Pair