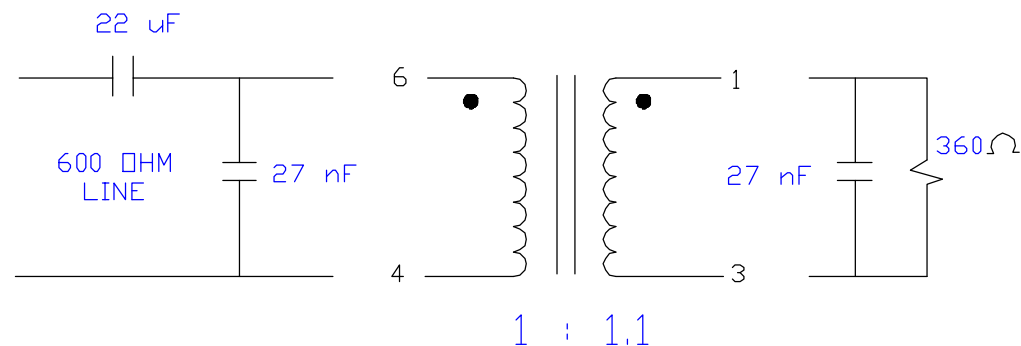
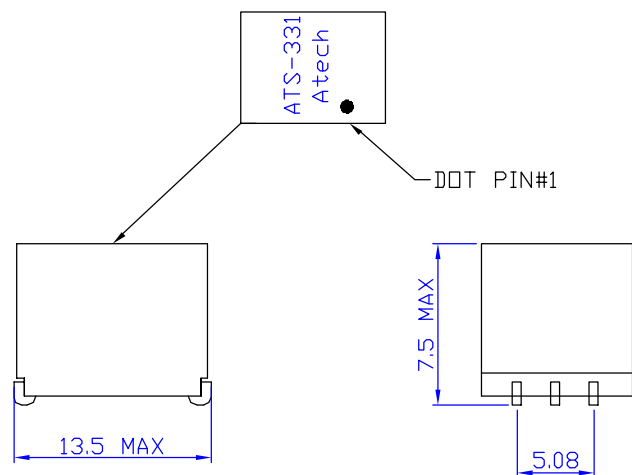


ELECTRICAL CHARACTERISTICS: (P3181 COMPATIBLE)

- 1 D.C.R. : PIN 1-3 = 185 OHM $\pm$ 10%
PIN 4-6 = 165 OHM $\pm$ 10%
- 2 INDUCTANCE : (@1KHZ, 0.1Vrms, PARALLEL)
PIN 1-3 = 3H MIN.
- 3 INSERTION LOSS (@1KHZ, 0dBm) = 3.5dB MAX.
- 4 FREQ. RESPONSE (REF. TO @1KHZ)
@60HZ = $\pm$ 0.2dB @4KHZ = $\pm$ 0.2 dB
- 5 RETURN LOSS : (REF, 600 OHM)
@200HZ = 26dB MIN. @4KHZ = 16 dB MIN.
- 6 TURN RATIO (@12KHZ, 1Vrms) 1-3:6-4=1.1 $\pm$ 1%
- 7 HI-POT (@3750VAC, 1mA, 2SEC) PRI-SEC
- 8 OPERATING TEMP. : -10 TO +70 DEG.C.
9. OPERATING HUMIDITY: 95% R.H.
10. RoHS COMPLIANCE.

						Atech®		TITLE 600: 360 TRANSFORMER	
						Atech Technology Co. Ltd. TEL(02)2794-6667 FAX(02)2794-8004		DWG. NO. ATS-331R	
	RELEASE	08/19/2005	BART	EEFLYS	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			
REVISIONS						08/19/05			
								DRAW	Pair