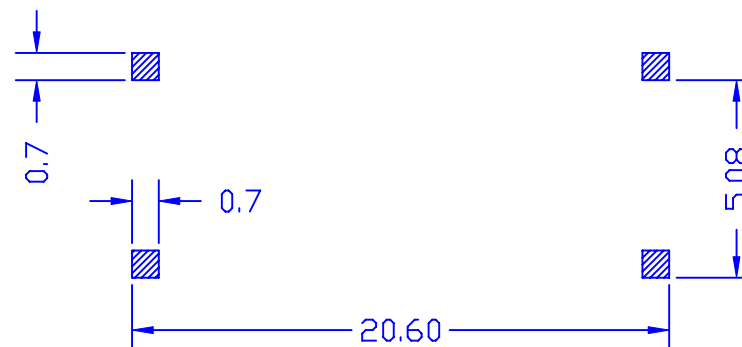
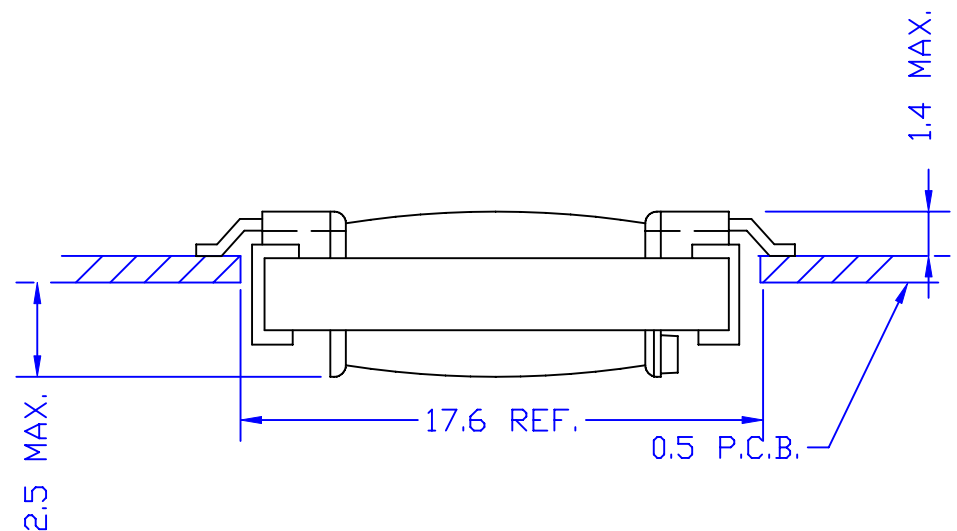
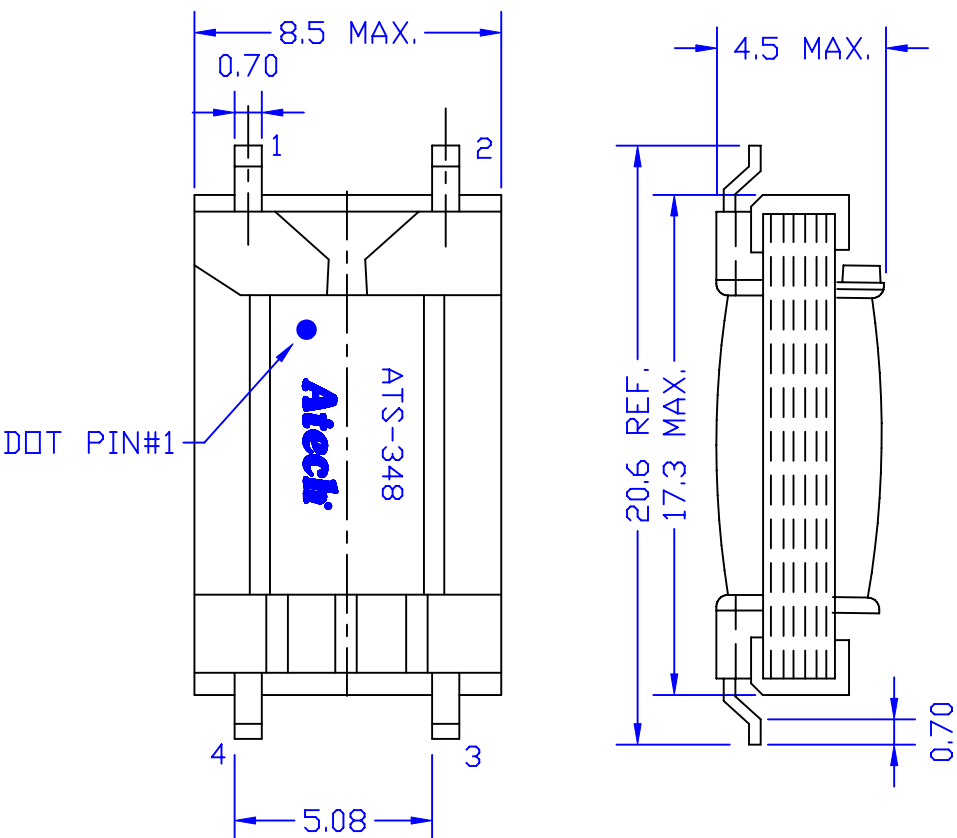


ELECTRICAL CHARACTERISTICS: (FOR V.90, MEET UL1950)

1. D.C.R. : PIN 1-2 = 170 Ω $\pm$ 12%. PIN 3-4 = 150 Ω $\pm$ 12%.
2. INDUCTANCE (@1KHZ, 1Vrms LP) : PIN 1-2 = 2.3Hy MIN.
3. INSERTION LOSS (@ 1KHZ, 0dBm, PIN 3-4 W/H 287 Ω M)
PIN 1-2 = 3.5 dB MAX.
4. FREQ. RESP.(REF. 1KHZ) : @200HZ-4KHZ = $\pm$ 0.1dB
5. RETURN LOSS (REF. 600 Ω M) : @ 200HZ - 4KHZ = 23dB MIN.
6. TURNS RATIO : PIN 1-2 : PIN4-3 = 1 $\pm$ 1%
7. LONGITUDINAL BAL. = 60dB MIN.(@200-4KHZ)
8. T.H.D. (@600HZ, -10dBm) = -80dB TYP.
9. HI-POT (@1650VAC, 1mA, 2SEC.) PRI. - SEC.

G	DCR	07/19/99	PAIR		SUEDY	Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE 600 : 287 TRANSFORMER	
F	L= 2.3 MIN.	06/10/99	PAIR		SUEDY		DWG. NO.	
E	THD = -80dB TYP.	05/24/99	PAIR		SUEDY		ATS-348	
	RELEASE	01/07/99	PAIR		SUEDY		SHEET 1 OF 1	
NO	DESCRIPTION	DATE	BY	CHK	APPD	UNITS: M/M	SAFETY	
REVISIONS						DATE 07/24/00	P/N: CTP30801MA	DRAW Pair