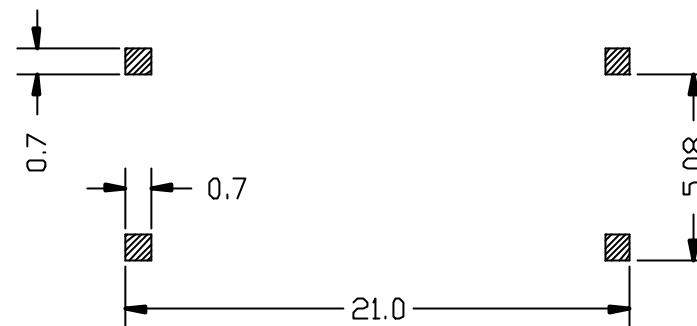
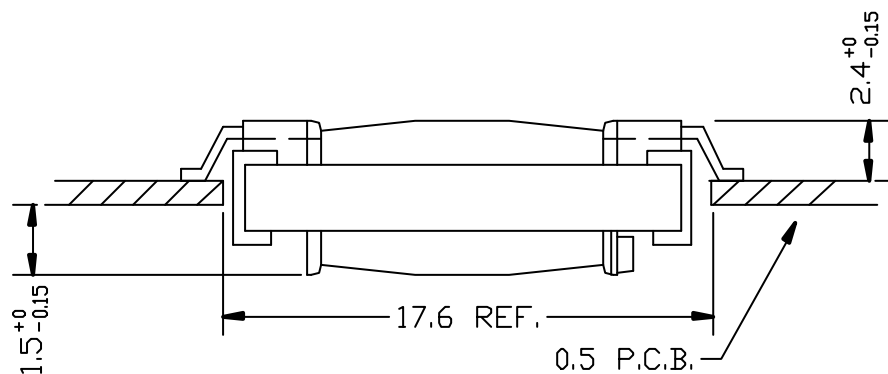
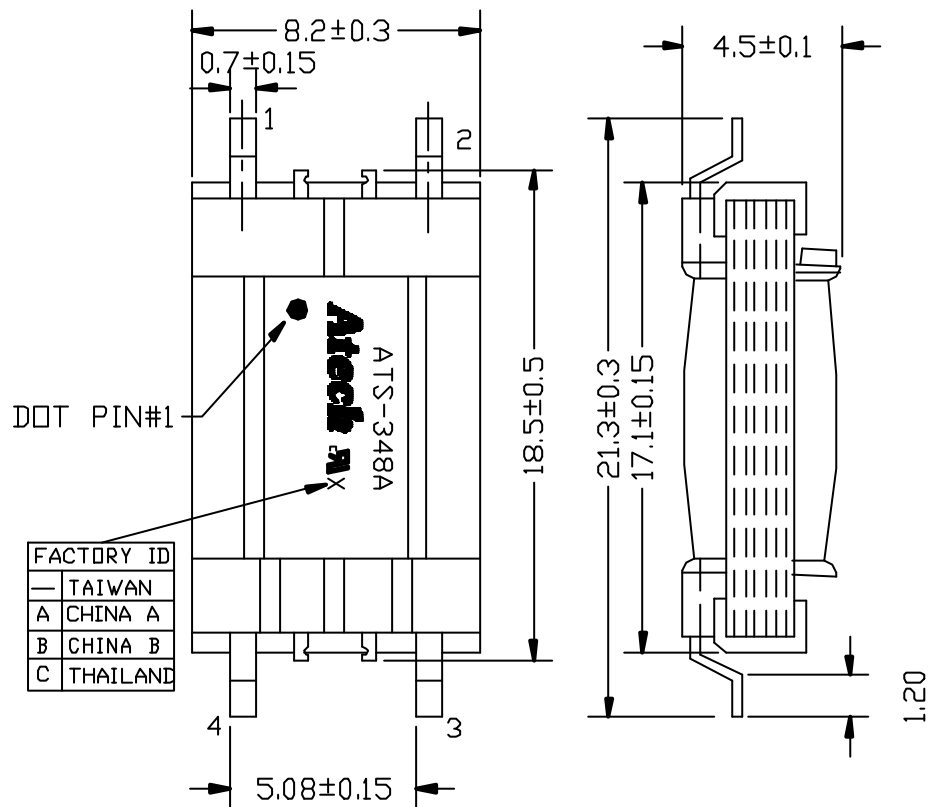


ELECTRICAL CHARACTERISTICS: (FOR V.90, MEET UL1950)

1. D.C.R. : PIN 1-2 = 170 OHM $\pm 12\%$ PIN 3-4 = 150 OHM $\pm 12\%$
2. INDUCTANCE (@1KHZ, 1Vrms LP) : PIN 1-2 = 2.3Hy MIN.
3. INSERTION LOSS (@ 1KHZ, 0dBm, PIN 3-4 W/H 287 OHM)
PIN 1-2 = 3.5 dB MAX.
4. FREQ. RESP.(REF. 1KHZ) : @200HZ-4KHZ = ± 0.1 dB
5. RETURN LOSS (REF. 600 OHM) : @ 200HZ - 4KHZ = 23dB MIN.
6. TURNS RATIO : PIN 1-2 : PIN4-3 = 1 $\pm 1\%$
7. LONGITUDINAL BAL. = 60dB MIN.(@200-4KHZ)
8. T.H.D. (@600HZ, -10dBm) = -80dB TYP.
9. HI-POT (@1650VAC, 1mA, 2SEC.) PRI. - SEC.

					Atech®		TITLE 600 : 287 TRANSFORMER	
B	DELETE N & DATE CODE	01/17/2001	PAIR		SUEDY	Atech Technology Co., Ltd. TEL:(02)2794-8867 FAX:(02)2794-8804	DWG. NO.	ATS-348AD
A	ADD FACTORY ID	10/07/00	PAIR		SUEDY			
	RELEASE	08/11/00	PAIR		SUEDY	UNITS	SAFETY	
NO	DESCRIPTION	DATE	BY	CHK	APPD	M/M		
REVISIONS						DATE	08/11/00	
							SHEET 1 of 1	
							DRAW <i>Pair</i>	