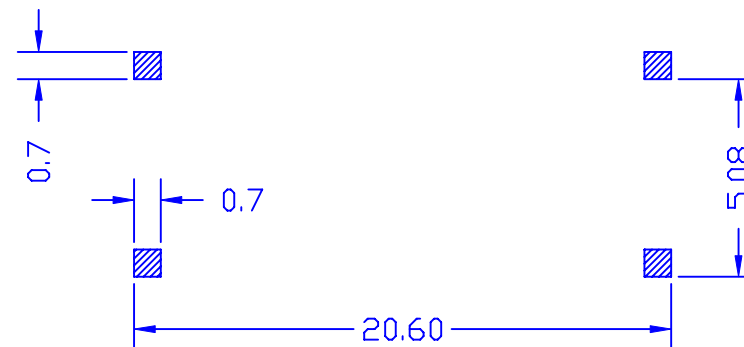
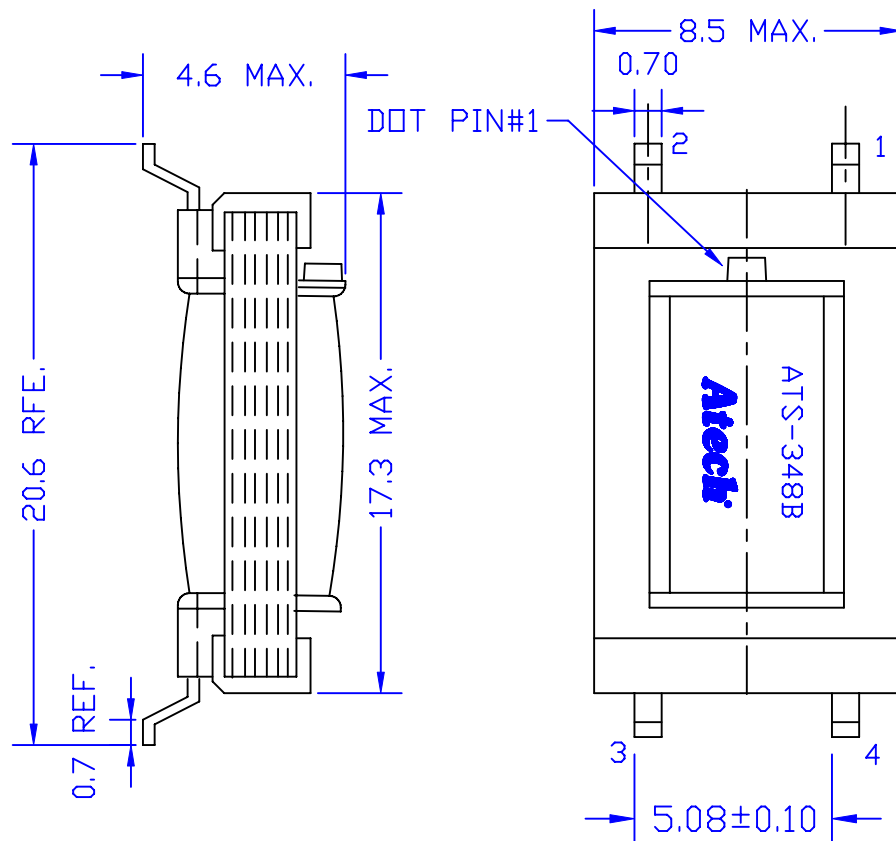


ELECTRICAL CHARACTERISTICS: (FOR V.90, MEET UL1950)

1. D.C.R. : PIN 1-2 = 170 Ω $\pm$ 12%. PIN 3-4 = 150 Ω $\pm$ 12%.
2. INDUCTANCE (@1KHZ, 1Vrms LP) : PIN 1-2 = 2.3Hy MIN.
3. INSERTION LOSS (@ 1KHZ, 0dBm, PIN 3-4 W/H 287 Ω M)
PIN 1-2 = 3.5 dB MAX.
4. FREQ. RESP.(REF. 1KHZ) : @200HZ-4KHZ = $\pm$ 0.2dB
5. RETURN LOSS (REF. 600 Ω M) : @ 200HZ - 4KHZ = 25dB MIN.
6. TURNS RATIO : PIN 1-2 : PIN4-3 = 1 $\pm$ 1%
7. LONGITUDINAL BAL. = 60dB MIN.(@200-4KHZ)
8. T.H.D. (@600HZ, -10dBm) = -80dB TYP.
9. HI-POT (@1650VAC, 1mA, 2SEC.) PRI. - SEC.

						Atech® Atech Technology Co., Ltd. TEL:(02)27946667 FAX:(02)27948004		TITLE 600 : 287 TRANSFORMER	
B	THD=-80dB TYP.	05/24/99	PAIR		SUEDY			DWG. NO. ATS-348B	
A	LABEL	05/04/99	PAIR		SUEDY	UNITS: M/M		SAFETY	
	RELEASE	04/16/99	PAIR		SUEDY	DATE 04/16/99		P/N: CTP308008A	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	REVISIONS		SHEET 1 OF 1	
								DRAW <i>Pair</i>	