
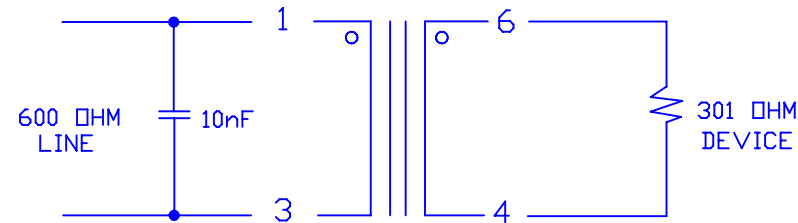
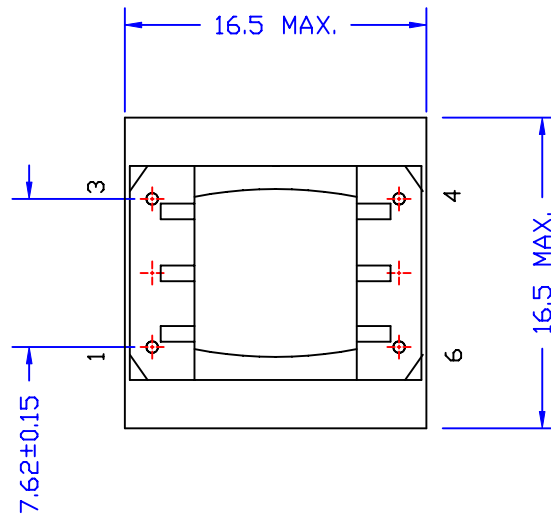


BLACK DOT PIN#1

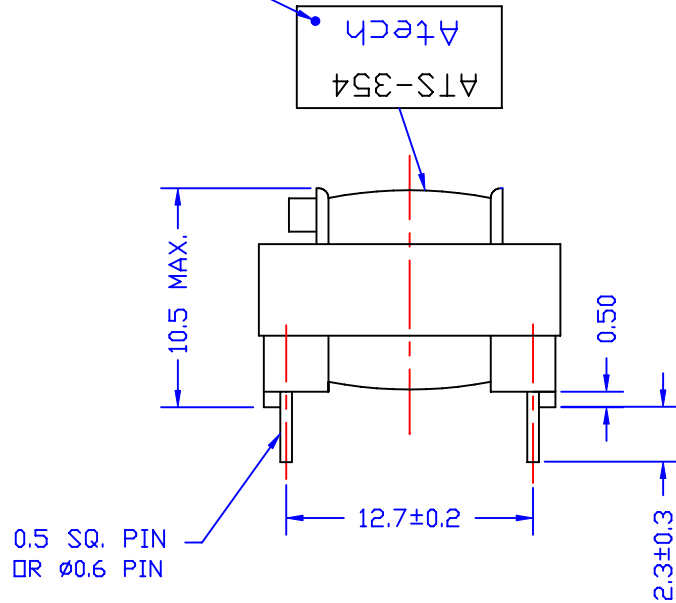

ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-3 = 150 Ω HM+/-12% PIN 6-4 = 150 Ω HM+/-12%.
2. INDUCTANCE(@250HZ,1Vrms, PARALLEL): PIN 1-3 = 20H MIN.
3. RETURN LOSS : (REF. 600 Ω HM) 200 TO 4KHZ = 30dB MIN.
4. INSERTION LOSS : (@1KHZ,0dBm) PIN 1-3 = 3+/- 0.3dB
5. FREQ. RESPONSE: (REF. 1KHZ) 200 TO 4KHZ = +/-0.2dB
6. LONGITUDINAL BALANCE : 200HZ-4KHZ 80dB MIN.
7. TURN RATIO : (8KHZ, 1Vrms) PIN 1-3 : 6-4 = 1+/-1%
8. DISTORTION : 150HZ, -3dBm : -76dB MAX.
300HZ, -10dBm : -76dB MAX.
9. HI-POT : (@1250VAC, 1mA, 2SEC) PRI-SEC

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE 600 : 301 TRANSFORMER	
B	ADD UL FILE NO	12/08/99	PAIR		SUEDY		DWG. NO.	
A	H=10.5 MAX.	03/03/99	PAIR		SUEDY		ATS-354	
	RELEASE	03/03/99	PAIR		SUEDY			
NO:	DESCRIPTION	DATE	BY	CHK	APPD	UNITS: M/M	SAFETY	SHEET 1 OF 1
						DATE 03/03/99	P/N: CTP31600DA	DRAW Pair
REVISIONS								