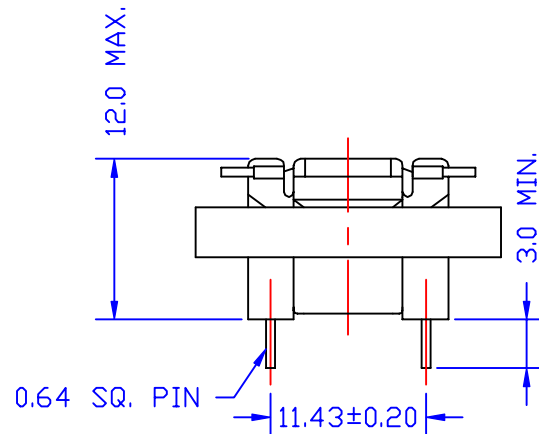
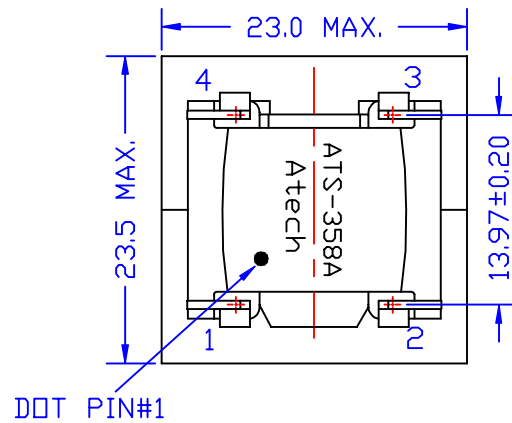


ELECTRICAL CHARACTERISTICS:

- DCR : PIN 1-2 = 153 OHM $\pm$ 12%.
PIN 3-4 = 147 OHM $\pm$ 12%.
- INDUCTANCE (@300HZ, 1Vrms) :
PIN 1-2 = 310 mH $\pm$ 25%.
- INSERTION LOSS
(@1KHZ, 0dBm, 80mADC PIN 4-3 W/H 301 OHM):
PIN 1-2 = 3.5 dB TYP.
- REQ RESP. (@REF 1KHZ) :
300HZ~4KHZ = 2.5dB MIN.
- RETURN LOSS (@REF 600 OHM) :
300HZ~4KHZ = 9dB MIN.
- LONGITUDINAL BAL. :
60HZ~1KHZ = 60 dB MIN.
1KHZ~4KHZ = 40 dB MIN.
- THD (@600HZ, -10dBm) :
PIN 1-2 (3-4 W/H 301 OHM) = -55dB TYP.
- TURN RATIO (@21KHZ, 1Vrms) :
PIN 1-2:4-3 = $\pm$ 1%.
- HI-POT (@2KVAC, 200uA, 2S) PIN 1-4

						Atech®		TITLE 600: 301 TRANSFORMER
						Atech Technology Co., Ltd.		DWG. NO.
						TEL: (02) 2794-6667 FAX: (02) 2794-8004		ATS-358A
	RELEASE	02/11/2004	BART	KEVIN	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	M/M		
						DATE		
REVISIONS						02/11/04	DRAW	