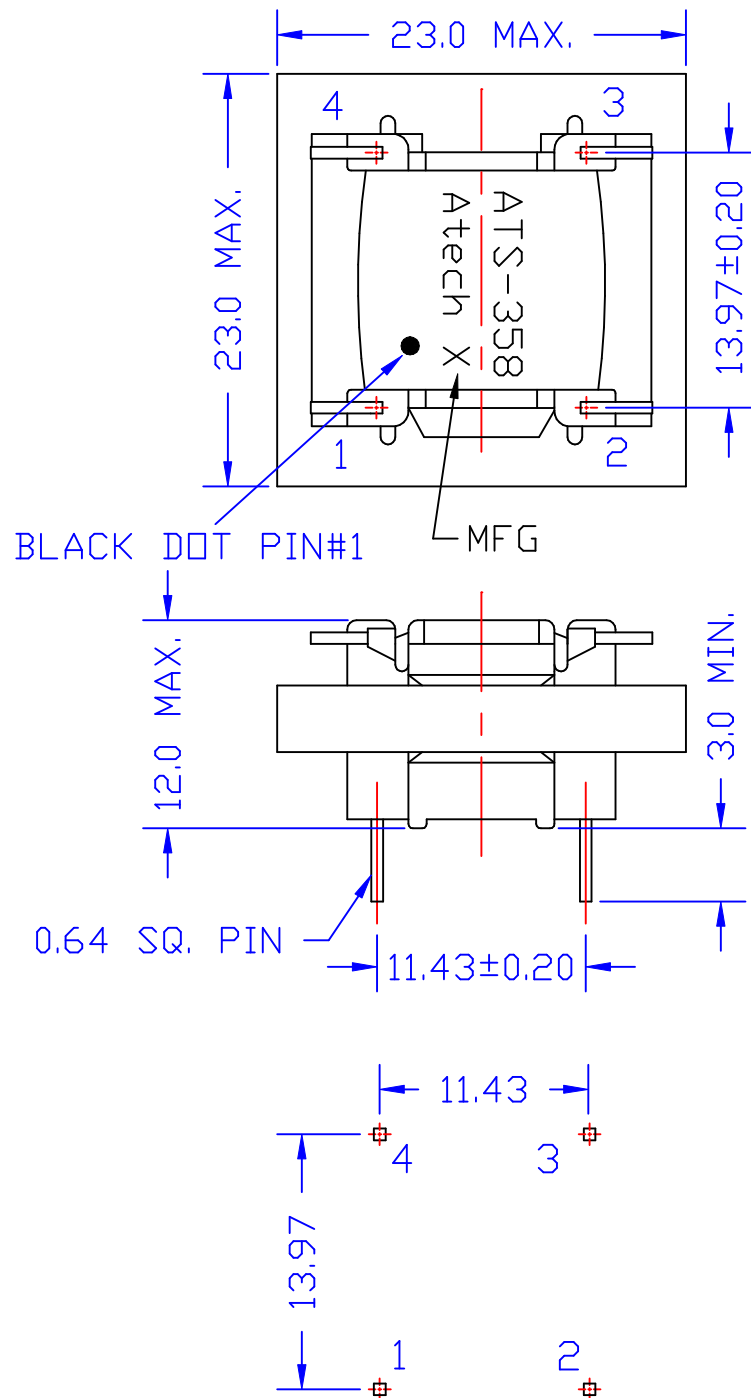


ELECTRICAL CHARACTERISTICS: (MEET UL 1950)

1. D.C.R. : PIN 1-2 = 114 OHM+/-10% PIN 3-4 = 114 OHM+/-10%
2. INDUCTANCE (@300HZ, 1Vrms, W/H 80mADC): PIN 1-2 = 160mH MIN.
3. RETURN LOSS : (REF. 600 OHM) @ 300HZ = 5dB MIN.
@ 4KHZ = 10dB MIN.
4. INSERTION LOSS : (@1KHZ, 0dBm, W/H 80mADC) 2.6+/-0.5dB
5. FREQ. RESPONSE : (REF. 1KHZ) @ 300HZ = +/-2.5dB
@ 4KHZ = +/-0.6dB
6. LONGITUDINAL BALANCE : 200HZ-4KHZ 65dB MIN.
7. TURN RATIO : (25KHZ, 1Vrms) PIN 1-2 : 4-3 = 1+/-1%
8. HI-POT : (@1650VAC, 1mA, 2 SEC.) PIN 1-4
9. LEAD FREE

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE 600 : 470 TRANSFORMER	
							DWG. NO. ATS-358N	
	RELEASE	05/27/2005	PAIR		SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW
REVISIONS						05/27/05		Pair