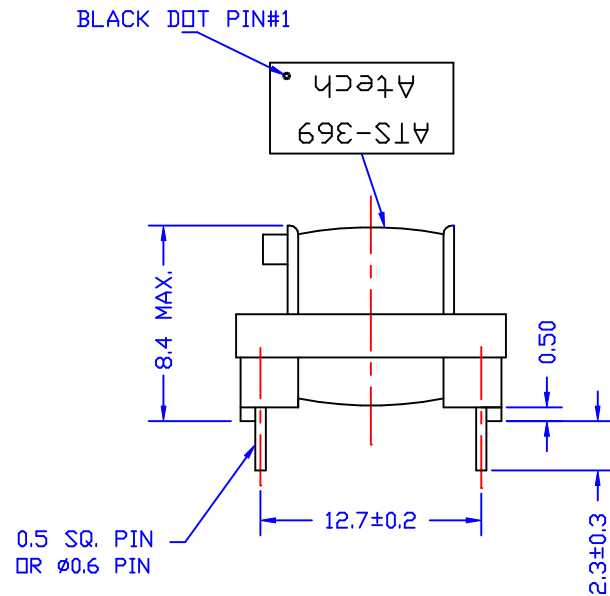


ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-3 = 6-4 = 113 OHM ± 12%
2. INDUCTANCE (@250HZ, 1Vrms, PARALLEL) : PIN 1-3 = 14H MIN.
3. RETURN LOSS : (REF. 600 OHM) 200 TO 4KHZ = 30dB MIN.
4. INSERTION LOSS : (@1KHZ, 0dBm) PIN 1-3 = 2.1 ± 0.3 dB
5. FREQ. RESPONSE : (REF. 1KHZ) 200 TO 4KHZ = ± 0.2 dB
6. LONGITUDINAL BALANCE : 200 HZ - 4KHZ 80 dB MIN.
7. TURN RATIO : (1KHZ, 1Vrms) PIN 1-3 : 6-4 = 1 ± 1%
8. HI-POT : (@1500V, 5mA, 2SEC) PRI-SEC

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE 600 : 374 TRANSFORMER	
							DWG. NO. ATS-369ABE	
	RELEASE	10/01/2004	BART	SUEDY	SUEDY	UNITS: M/M	SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 10/01/04	SHEET 1 OF 1	
REVISIONS							DRAW Pair	