
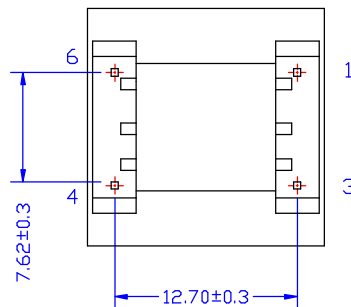

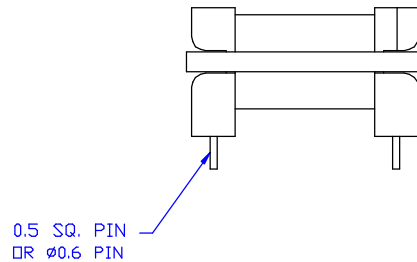
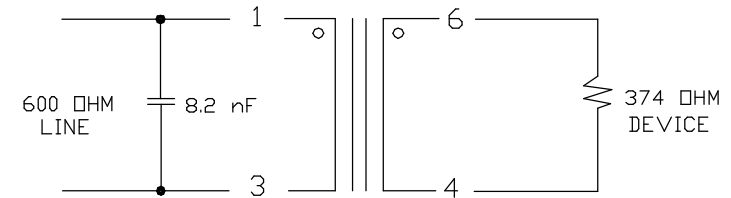



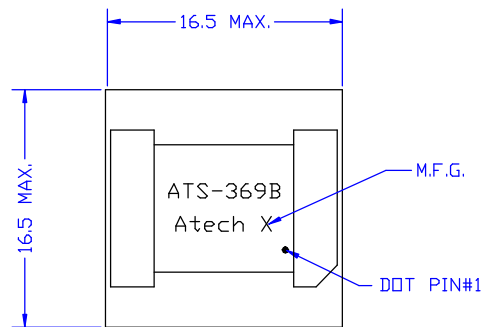

ELECTRICAL CHARACTERISTICS:

- DCR : PIN 1-3 = $113 \pm 12\%$.
PIN 6-4 = $113 \pm 12\%$.
- INDUCTANCE PARALLEL (@250HZ, 1Vrms) :
PIN 1-3 = 14H MIN.
- RETURN LOSS (@REF 600 OHM) :
200HZ TO 4KHZ = 30 dB MIN.
- INSERTION LOSS (@1KHZ, 0dBm) :
PIN 1-3 = 2.1 ± 0.3 dB.
- FREQ. RESP. (@REF 1KHZ) :
200HZ TO 4KHZ = ± 0.2 dB.
- LONGITUDINAL BALANCE :
200HZ TO 4KHZ = 80 dB MIN.
- TURN RATIO (@11KHZ, 1Vrms) :
PIN 1-3 : 6-4 = $1 \pm 1\%$.
- HI-POT (@1250VAC, 1mA, 2S) : PRI-SEC.

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE 600 : 374 TRANSFORMER	
							DWG. NO. ATS-369B	
	RELEASE	04/15/2004	BART	KEVIN	SUEDY	UNITS: M/M	SAFETY	SHEET1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		
REVISIONS						04/15/04		