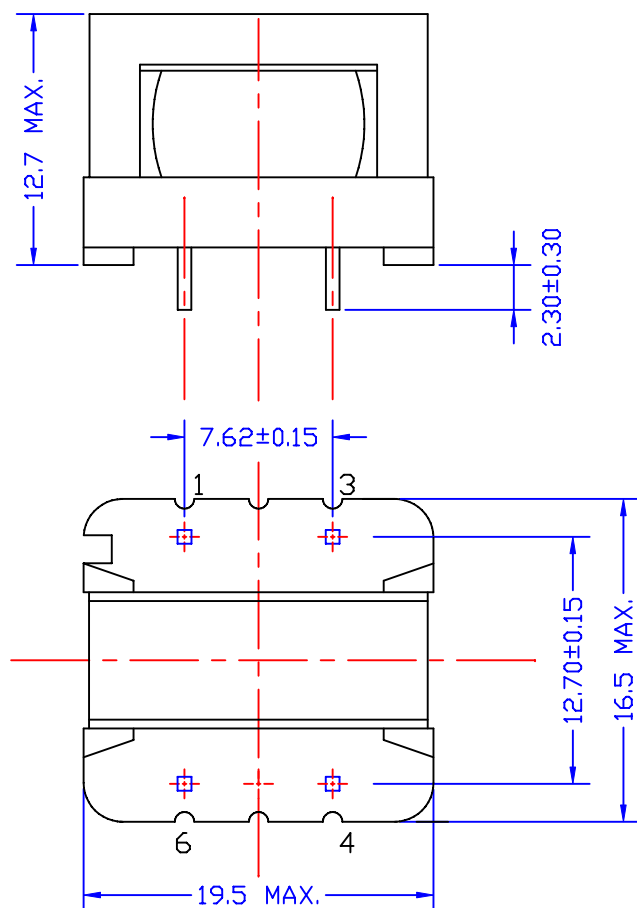


ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-3 = 113 OHM+/-12% PIN 6-4 = 113 OHM+/-12%
2. INDUCTANCE(@250HZ,1Vrms, PARALLEL): PIN 1-3 = 17H MIN.
3. RETURN LOSS : (REF. 600 OHM) 200 TO 4KHZ = 30dB MIN.
4. INSERTION LOSS : (@1KHZ,0dBm) PIN 1-3 = 2.1+/- 0.3dB
5. FREQ. RESPONSE: (REF. 1KHZ) 200 TO 4KHZ = +/-0.2dB
6. LONGITUDINAL BALANCE : 200HZ-4KHZ 80dB MIN.
7. TURN RATIO : (9KHZ, 1Vrms) PIN 1-3 : 6-4 = 1+/-1%
8. DISTORTION : 150HZ, -3dBm : -75dB MAX.
 300HZ, -10dBm : -75dB MAX.
9. HI-POT : (@1250VAC, 1mA, 2SEC) PRI-SEC

						Atech® Atech Technology Co.. Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE 600 : 374 TRANSFORMER	
							DWG. NO.	ATS-369E119
	RELEASE	04/12/99	PAIR		SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						04/12/99		