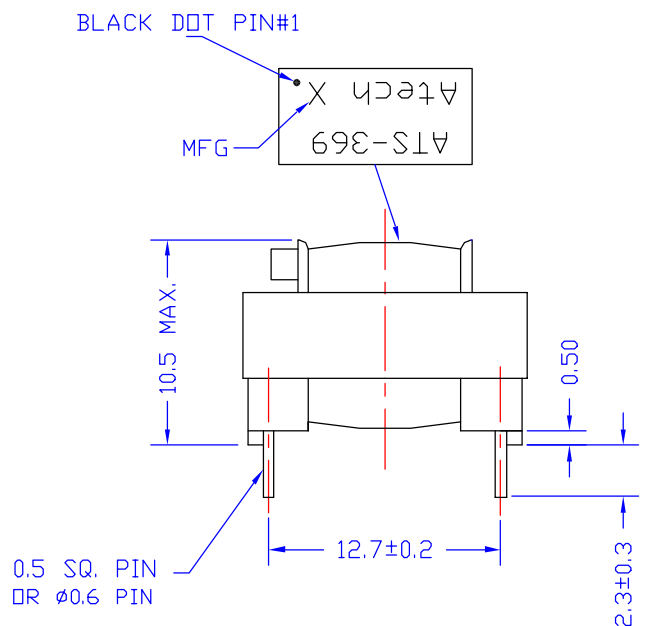


ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-3 = 113 OHM+/-12% PIN 6-4 = 113 OHM+/-12%
2. INDUCTANCE(@250HZ,1V_{rms}, PARALLEL): PIN 1-3 = 17H MIN.
3. RETURN LOSS : (REF. 600 OHM) 200 TO 4KHZ = 30dB MIN.
4. INSERTION LOSS : (@1KHZ,0dBm) PIN 1-3 = 2.1+/- 0.3dB
5. FREQ. RESPONSE: (REF. 1KHZ) 200 TO 4KHZ = +/-0.2dB
6. LONGITUDINAL BALANCE : 200HZ-4KHZ 80dB MIN.
7. TURN RATIO : (9KHZ, 1V_{rms}) PIN 1-3 : 6-4 = 1+/-1%
8. DISTORTION : 150HZ, -3dBm : -75dB MAX.
300HZ, -10dBm : -75dB MAX.
9. HI-POT : (@1250VAC, 1mA, 2SEC) PRI-SEC
10. RoHS COMPLIANCE

						Atech® Atech Technology Co., Ltd. TEL:(02)2784-6667 FAX:(02)2784-8004		TITLE 600 : 374 TRANSFORMER	
								DWG. NO. ATS-369R	
	RELEASE	09/14/2005	BART	LYS	SUEDY	UNITS: M/M		SAFETY	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						09/14/05		DRAW Pair	