

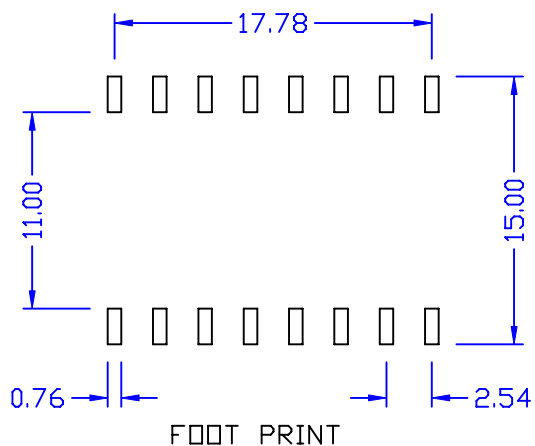
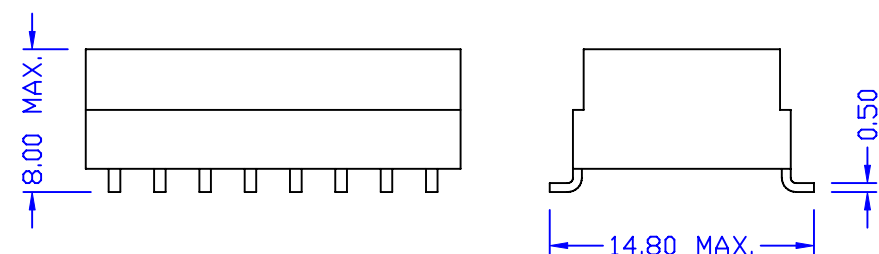


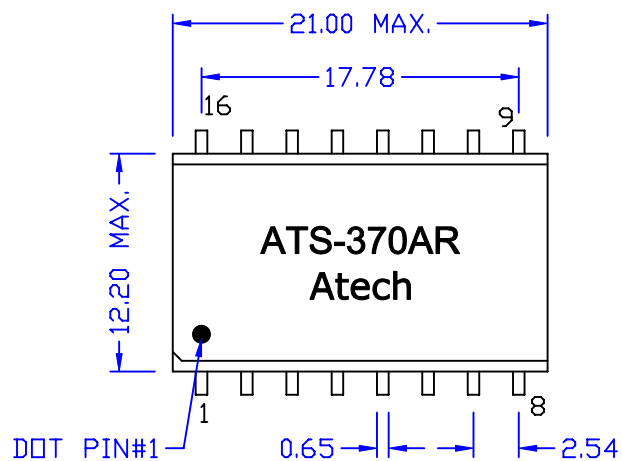

TOLERANCES : XX.X $\pm$ 0.25
X.XX $\pm$ 0.05

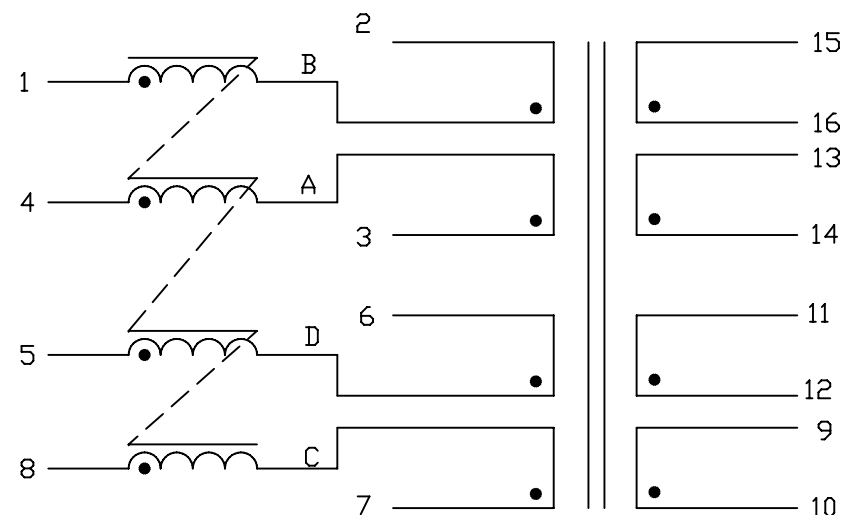

ELECTRICAL SPECIFICATIONS@25°C :

- D.C.R : 1-2 = 3-4 = 2.9 OHM MAX.
9-10 = 11-12 = 1.46 OHM MAX.
13-14 = 15-16 = 1.46 OHM MAX.
- INDUCTANCE(@10KHZ,0.1Vrms,ALC = OFF) :
1-4 = 46mH MIN. (2-3 SHORT)
5-8 = 46mH MIN. (6-7 SHORT)
9-10 = 11-12 = 6.5mH MIN.
13-14 = 15-16 = 6.5mH MIN.
- INTERWINDING CAP.(@100KHZ,0.1Vrms) : 1-16 = 8-9 = 108pF MAX.
- TURN RATIO(@500VAC,1mA,2SEC) : 13-14 : 15-16 = 1.0 $\pm$ 1%
9-10 = 11-12 = 1.0 $\pm$ 1%
- HI-POT(@500VAC,1mA,2SEC) : 1-16(2-3,14-15 SHORT)
8-9(6-7,10-11,SHORT)
1-8(2-3,6-7,10-11,14-15 SHORT)

6. RoHS COMPLIANT

						Atech®		TITLE
						Atech Technology Co. Ltd.		TRANSFORMER
						TEL:02794-6667 FAX:02794-8004		DWG. NO.
								ATS-370AR
						UNITS:	SAFETY	SHEET 1 OF 1
						M/M		
						DATE	P/N:	DRAW
						12/18/06	CTSG08001A	Pair
REVISIONS								