
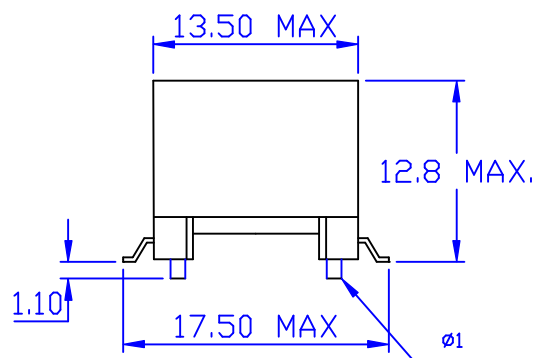
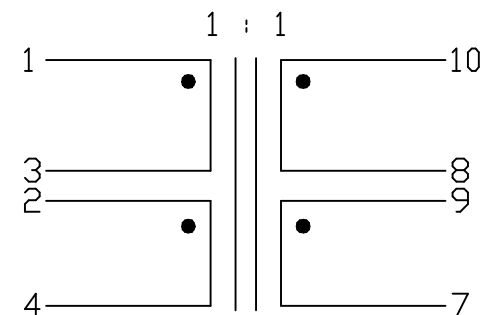
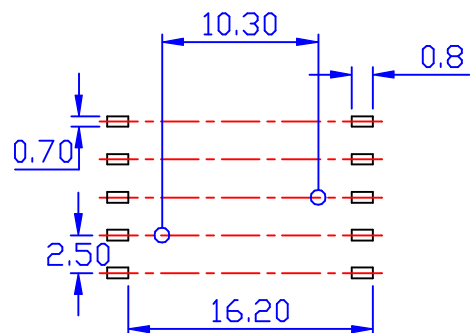


DOT PIN#1



ELECTRICAL CHARACTERISTICS : <FOR ALCATEL ADSL CPE>

1. D.C.R. : PIN 1-4 <2-3 SHORT> = 3.2 OHM MAX.
PIN 10-7 <9-8 SHORT> = 3.2 OHM MAX.
2. TURNS RATIO : <@60KHZ, 1Vrms> 10-8 : 9-7 : 1-3 : 2-4 = 1 ± 1%
3. INDUCTANCE : <@10KHZ, 0.1Vrms> 10-7 <8-9 SHORT> = 470 uH ± 5%
4. LEAKAGE INDUCTANCE : <@10KHZ, 0.1 Vrms, W/H 1-4, 2-3, 8-9 SHORT>
10-7 = 10 uH MAX.
5. CW : <@10KHZ, 0.1Vrms, 2-3, 8-9 SHORT> 1-10 = 50 pF MAX.
6. L/B : <@20KHZ- 1.1 MHZ> 40dB MIN.
7. HI-POT : <@2100VAC, 1mA, 6SEC> PRI.-SEC.
8. INSULATION RESISTANCE <@500 VDC> : 100 M OHM MIN.

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE ADSL TRANSFORMER	
							DWG. NO. ATS-376A	
	RELEASE	06/27/2001	DOLLY		SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW
REVISIONS						06/27/01		